



FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181 E-mail: info@fenixlight.com Web: www.fenixlight.com
Address: 3F, Building A, 111 Shuiku Road, Bao'an District, Shenzhen 518102, China

61.599.991.025-A2-20251210

2026 PRODUCT
CATALOG

BRAND OVERVIEW

Fenix > Founded in 2001, Fenix has developed into a leading high-tech enterprise, specializing in the R&D, manufacturing, sales, and marketing of mobile lighting products including flashlights, tactical lights, headlamps, bicycle lights, lanterns, and lighting accessories. Our products are widely used in a variety of use cases, including EDC(everyday carry), hiking, caving, riding, hunting, search and rescue, military and police patrols, security, and industrial works.

Since Fenix was founded, we have received acclaim and recognition from users across the globe for our excellent product and customer service, and we are committed to becoming the world's leading mobile lighting brand.

2001

Establishment

120+

Countries and regions

1000W+

Consumer users



WORLDWIDE SALES NETWORK



Fenix products are now being sold in many mainstream sales channels in domestic and overseas

- REI - The world's largest outdoor chain channel.
- Grainger - The largest industrial chain channel in the United States.
- Bass Pro Shops - The largest outdoor chain channel in the United States.
- Fastenal - The largest fastener distributor in North America.
- Scheels - Large-scale sporting goods & outdoor goods retailer.
- Sportsman's Warehouse - Outdoor sporting goods retailer.
- Galls - Leading chain store of public safety equipment and uniforms.
- Frankonia - The largest hunting chain channel in Germany.
- Unterwegs - Outdoor goods chain retailer in Germany.
- Globetrotter - Top-tier outdoor retail chain in Germany.
- MEC - Canada's largest outdoor chain channel.
- SAIL - Canada's large-scale outdoor goods retailer.
- Bever - The largest outdoor chain channel in the Netherlands.
- Tiexuejunpinxing - China's most well-known military product chain store.
- Sanfu Outdoor - the largest outdoor chain channel.
- Firefox Outdoor, Zhongjiahe Outdoor, etc.



CONTENT INDEX



01 FLASHLIGHTS

E Series (EDC Flashlights)		06
LD Series (Professional Outdoor Flashlights)		13
PD Series (Portable High-performance Flashlights)		17
TK Series (Tough and Powerful Flashlights)		25
HT Series (Hunting Flashlights)		34
LR Series (Searching Flashlights)		36
S Series (Specialized Flashlights)		41
WF Series (Industrial Flashlights)		43
WT Series (Multifunctional Work Lights)		47

02 HEADLAMPS

HL Series (Lightweight Outdoor Headlamps)		49
HM Series (All-metal High-performance Integrated Headlamps)		53
HP Series (High-performance Separated Headlamps)		62
WH Series (High-performance Industrial Headlamps)		65

03 TACTICAL LIGHTS

GL Series (Professional Tactical Lights)		67
---	--	----

04 BICYCLE LIGHTS

BC Series (High-performance Integrated Bicycle Lights)		72
---	--	----

05 CAMPING LANTERNS

CL Series (High-performance Camping Lanterns)		77
CP Series (High-performance Multifunctional Camping Lanterns)		81

06 ACCESSORIES

Accessories	-	82
Accessories Compatibility Guide	-	91
Fenix Products Specification Chart	-	97

07 BRAND HONOR

Prizes	-	107
Brand Mission	-	109
Customer Service	-	112

*There may be some differences between the upcoming product and its finally listed version.

FLASHLIGHTS

E / LD / PD / TK / HT / LR / S / WF / WT

Fenix **flashlights** are specifically designed for all kinds of harsh environments. All flashlight products fully embody toughness, reliability, and user-friendliness. Fenix makes a flashlight that can fit any need, whether it is tactical law enforcement, industrial operations, searching and rescuing or outdoor hiking. Excellent ability to withstand harsh conditions, easy to use, and comfortable grip, all of which make Fenix flashlights stand out from our competitors.



E SERIES



E01 V2.0

Mini Keychain Flashlight



- Ultra-compact size for everyday carry.
- One-handed operation with the rotating switch.
- All-metal CNC machining light body.
- Two colors for option.

Black

Blue

Size: 2.62" x 0.59" x 0.55"/66.5 x 15 x 14 mm
Weight: 0.46 oz /13 g (excluding battery)
Product ID: E01.11117
E01.13117

E03R V2.0

All-metal Keychain Flashlight



- Compact size for everyday carry.
- USB Type-C rechargeable.
- Red warning light.
- Breathing indicator with variable color.

Grey

Blue

Size: 2.07" x 1.02" x 0.51"/52.5 x 26 x 13 mm
Weight: 1.06 oz /30 g (including battery)
Product ID: E03R.13112
E03R.12111



E04R

Multi-LED Clip-on EDC Flashlight



- Red and white dual main light and red-and-blue side warning light.
- 360° rotatable clip supports multiple wearing and usage methods.
- USB Type-C charging.
- Simple and fast operation with the dual switch.
- Physical lockout and intelligent memory circuit enhance user experience.

Black

White

Size: 2.28" x 1.24" x 1.14"/58 x 31.5 x 29 mm
Weight: 1.41 oz /40 g (including battery)

E05R

Rechargeable Mini Keychain Flashlight



- Mini size for perfect everyday carry.
- Instant Burst.
- Hidden micro USB charging port.
- All-metal CNC precision processing.

Green

Black

Brown

Size: 2.68" x 0.60" x 0.59"/68 x 15.3 x 15 mm
Weight: 0.85 oz/24 g (including battery)
Product ID: E05R.11111
E05R.17111
E05R.14111

E06R

3-in-1 Keychain Flashlight



- Max 700 lumens output and 110 meters beam distance.
- White light, UV light, red laser.
- USB Type-C rechargeable.
- RGB breathing light ring creates ambience lighting.
- Magnetic tail for hands-free use.

Gun grey

Turquoise

Size: 2.72" x 1.14" x 0.63"/69 x 29 x 16 mm
Weight: 1.90 oz/54 g (including battery)
Product ID: E06R.12111
E06R.14111



E06R UE

Triple-light-source Dual-control Flashlight

- Max 1600 lumens output and 160 meters beam distance.
- White light (spotlight and floodlight), red light, and green laser.
- USB Type-C charging.
- 3D mood light ring provides multiple lighting effects for both emergencies and relaxation.



Size: 4.84" x 1.22" x 0.75"/123 x 31 x 19 mm
Weight: 3.67 oz/104.1 g (including battery)

Black Green Orange

E08R UE

Multi-LED Dual-control Flashlight

- Max 1600 lumens output and 160 meters beam distance.
- White light (spotlight and floodlight), red light, and red laser.
- Instant activation, turbo, and strobe with the tail switch.
- All-metal flashlight body.
- Included two-way body clip.
- Light ring features multiple lighting effects.
- Gravity-sensing function.



Size: 5.08" x 1.23" x 0.75"/129 x 31.2 x 19 mm
Weight: 4.20 oz/119 g (including battery)

Black Green

E09R

Rechargeable Mini High-output Flashlight

- Max 600 lumens output and 124 meters beam distance.
- Hidden USB Type-C charging port.
- All-metal CNC precision processing.
- Ultra-compact size for convenient carrying every day.



Size: 3.11" x 0.76" x 0.72"/79 x 19.3 x 18.4 mm
Weight: 1.59 oz/45 g (including battery)
Product ID: E09R.11111

E06R Pro

Triple-light-source Dual-control Flashlight

Black Olive drab Orange



- Max 1600 lumens output and 160 meters beam distance.
- White light (spotlight and floodlight), UV light, and red laser.
- USB Type-C charging.
- 3D mood light ring provides five lighting effects for both emergencies and relaxation.

General Mode (Spotlight)					General Mode (Floodlight)					Scene Mode				Special Mode				
High	Med	Low	Eco	Moon-light	High	Med	Low	Eco	Moon-light	Red flash	Blue flash	Red & blue flash	RGB	Aurora	UV light	Red laser	Strobe	Turbo
1000 lm	350 lm	150 lm	30 lm	5 lm	750 lm	350 lm	150 lm	30 lm	5 lm	1 lm	1 lm	1 lm	0.5 lm	0.5 lm	365 nm	650 nm	1600 lm	1600 lm
2 h 15 min	2 h 30 min	4 h 30 min	24 h	104 h	2 h 20 min	3 h 12 min	4 h 35 min	24 h 30 min	111 h	/	/	/	/	/	/	/	1 h 19 min	

Size: 4.84" x 1.22" x 0.75"/123 x 31 x 19 mm
Weight: 3.67 oz/104.1 g (including battery)
Product ID: E06R.11112, E06R.14112, E06R.15112

E12 V3.0

Portable EDC Flashlight

- ★ Magnetic tail for hands-free use.
- ★ No standby current, safe and cost-efficient.
- ★ Tail switch for on/off function and output selection.
- ★ Two-way body clip and tail standing capability for added convenience.



Size: 3.21" x 0.76" x 0.69"/81.5 x 19.3 x 17.4 mm
Weight: 1.90 oz/53.9 g (including battery)
Product ID: E12.11118

E28R V2.0

Rechargeable EDC Flashlight

- ★ Max 1700 lumens output and 273 meters beam distance.
- ★ Magnetic tail for hands-free use.
- ★ Two-way body clip for versatile attachment.
- ★ USB Type-C charging; 3 hours from depletion to fully charged.
- ★ Unique warning light.



Size: 4.76" x 1.04" x 0.89"/121 x 26.5 x 22.5 mm
Weight: 4.52 oz/128 g (including battery)
Product ID: E28R.11113

E18R V2.0

Ultra-compact High-performance EDC Flashlight

- ★ Max 1200 lumens output.
- ★ USB Type-C fast charging.
- ★ Magnetic tail - eliminates hand fatigue.
- ★ Electronic lockout + physical lockout.
- ★ Two-position body clip for convenient carry.

HOT



Size: 2.64" x 0.87" x 0.87"/67 x 22 x 22 mm
Weight: 1.98 oz/56 g (including battery)
Product ID: E18R.11112

E35R

High-performance EDC Flashlight

- ★ Max 3100 lumens output.
- ★ USB Type-C charging port.
- ★ Magnetic base for hands-free use.
- ★ Lockout function avoids accidental activation.

HOT



Size: 4.72" x 1.04" x 0.98"/120 x 26.5 x 24.8 mm
Weight: 5.22 oz/148 g (including battery)
Product ID: E35R.11111

E20 V2.0

Compact EDC Flashlight

- ★ Max 350 lumens output and 126 meters beam distance.
- ★ One-handed operation with the tail switch.
- ★ Digitally regulated circuit for maintaining a stable output.
- ★ Intelligent overheat protection and reverse polarity protection.



Size: 5.00" x 0.83" x 0.66"/127 x 21 x 16.8 mm
Weight: 1.48 oz/42 g (excluding battery)
Product ID: E20.11114

Utility Model Patent: ZL 201820183805.8



LD SERIES



Flashlights LD Series

LD12R

Dual Light Sources Multipurpose Portable Flashlight



- Max 600 lumens output and 186 meters beam distance.
- Rotate the light head to quickly choose between the main light and the side light.
- Magnetic body clip for hands-free use.
- Hidden Type-C charging port.

Utility Model Patent: ZL 202223499611.4



Size: 4.76" x 0.87" x 0.75"/121 x 22 x 19 mm
Weight: 2.61 oz/74 g (including battery)
Product ID: LD12R.11111



LD22 V2.0

Multi-purpose Outdoor Flashlight

- Max 800 lumens output and 214 meters beam distance.
- Powered by a 1600mAh rechargeable Li-ion battery pack, compatible with 2 x AA batteries.
- Dual body clip for easy carry.
- Instant on with the tactical tail switch and output selection with the side switch.



Size: 5.83" x 0.85" x 0.71" / 148 x 21.5 x 18 mm
Weight: 3.49 oz / 99 g (including battery)
Product ID: LD22.11113



LD12R



LD22 V2.0



LD30R



LD35R



LD36R



LD45R

LD30R

High-performance Outdoor Flashlight

- Max 1700 lumens output and 267 meters beam distance.
- Tactical tail switch for instant activation.
- Side switch for mode selection.
- Strobe mode and SOS mode for outdoor activities.
- Two-way body clip for versatile attachment.



Size: 5.11" x 1.04" x 0.89"/129.7 x 26.5 x 22.6 mm
Weight: 4.66 oz/132 g (including battery)
Product ID: LD30R.11111



LD36R

High-performance Multicolor Flashlight

NEW

- Max 3600 lumens output and 385 meters beam distance.
- Colorful light mode provides multiple atmospheric lighting effects.
- Stepless colorful light mode enables free color selection.
- Included diffuser tip converts the flashlight into a reading or atmosphere light.
- Inner waterproof USB Type-C charging port.
- Light tail features a threaded tripod socket for convenient mounting.



Size: 5.50" x 1.57" x 1.04"/139.6 x 40 x 26.5 mm
Weight: 8.15 oz/231 g (including battery)
Product ID: LD36R.11111
LD36R.22111

Black

Flame Camo

LD45R

Digital Focusing Flashlight

- Digital focusing technology enables precise adjustments between spotlight and floodlight with a single hand.
- OLED smart display informs users of the flashlight's current status.
- Inner waterproof USB Type-C charging port.
- SOS mode and strobe mode enhance safety during outdoor activities.




Size: 6.11" x 1.75" x 1.26"/155.3 x 44.5 x 32 mm
Weight: 10.62 oz/302 g (including battery)
Product ID: LD45R.11111



LD35R

Triple-light-source Multipurpose Flashlight

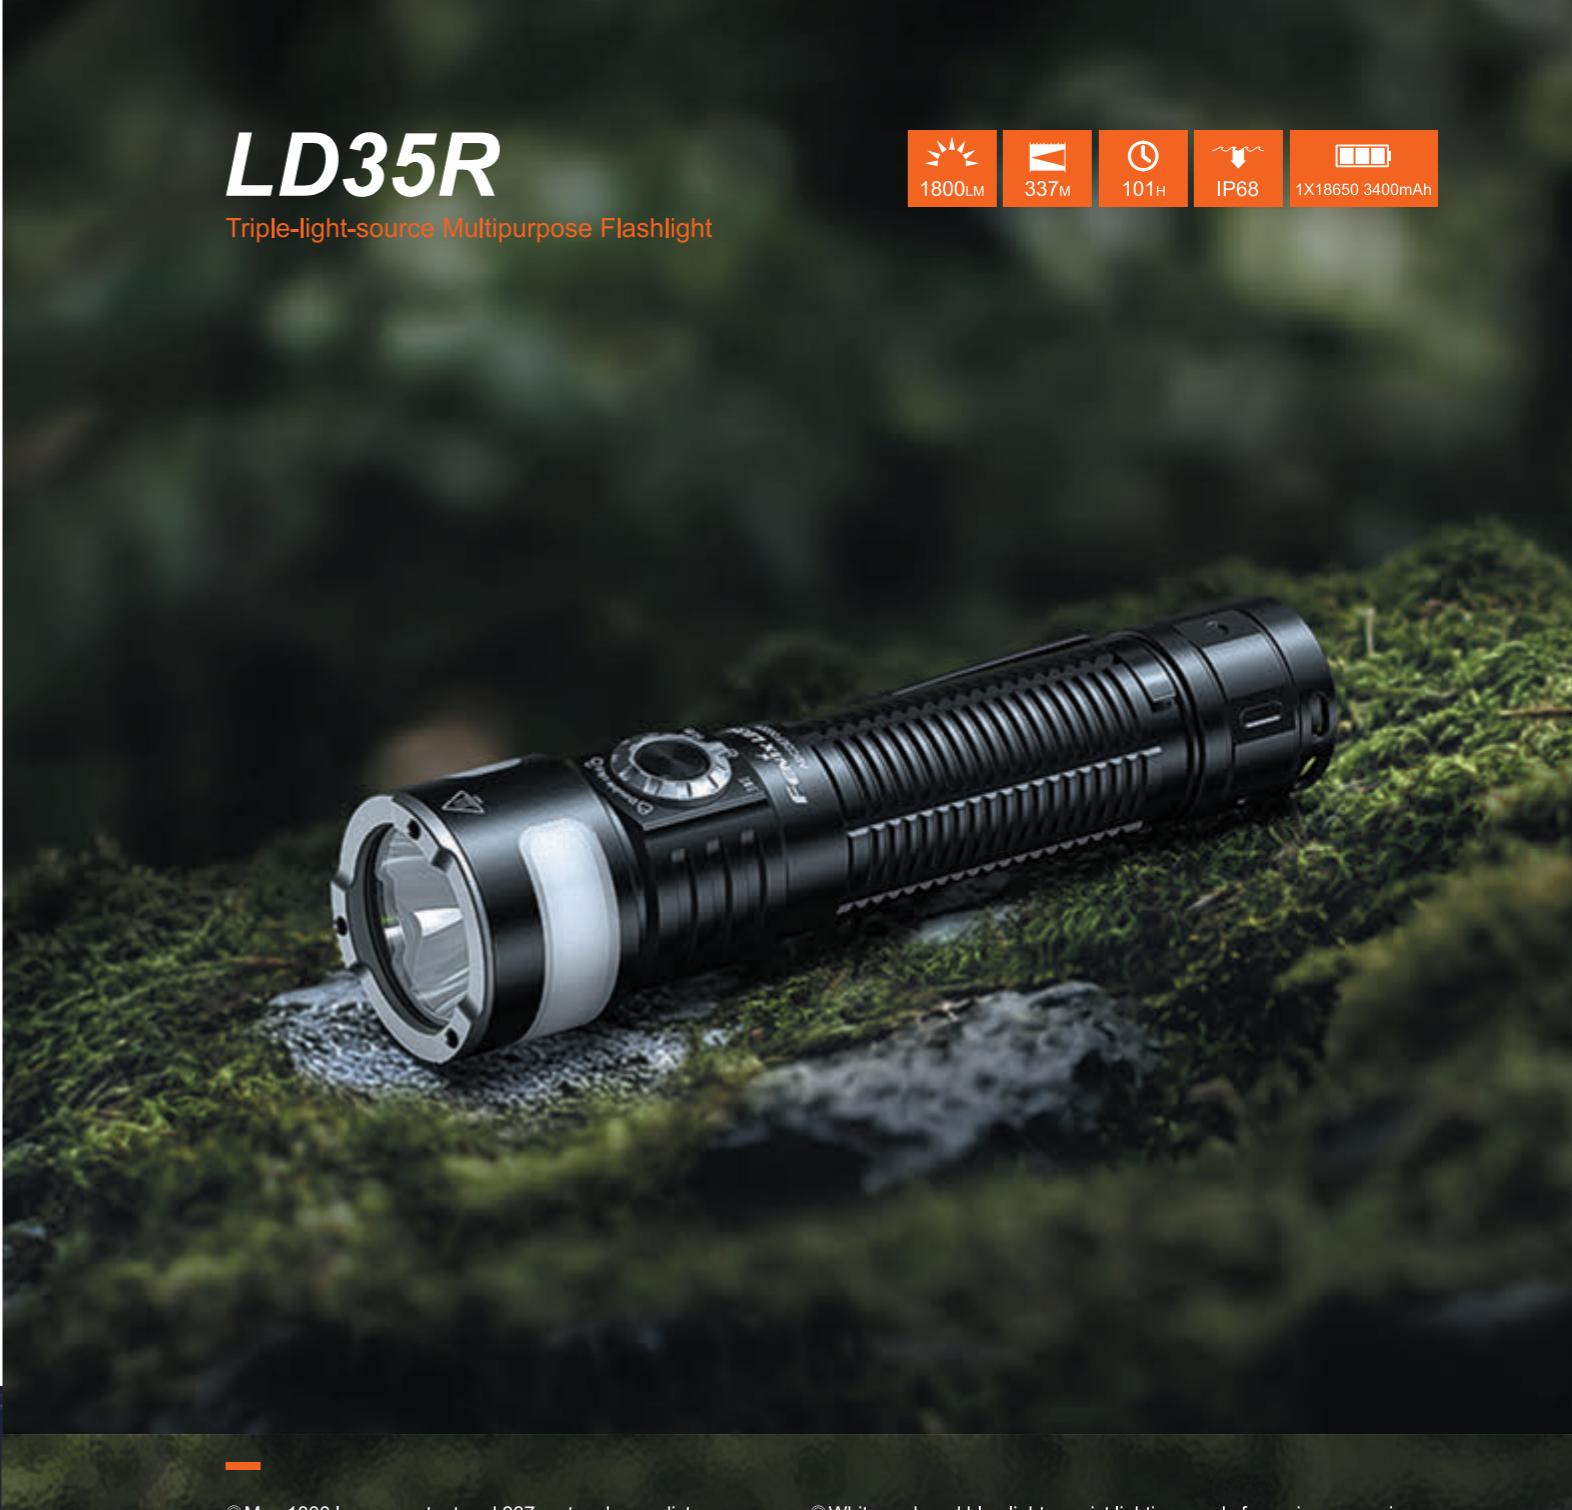

- Max 1800 lumens output and 337 meters beam distance.
- White, red, and blue lights assist lighting needs for various occasions.
- Main and side lights; side lights provide single-sided lighting and dual-sided 360° lighting.
- Magnetic tail for hands-free use.
- Stainless steel strike bezel inlaid with ceramic breaking tips.
- Inner waterproof USB Type-C charging port.

Main light					Strobe Mode	Side lights					White Light Mode			
General Mode					Strobe Mode	White Light Mode				Strobe Mode	Red/Blue Light Mode			
Turbo	High	Med	Low	Eco		Dual-sided (High)	Dual-sided (Low)	Single-sided (High)	Single-sided (Low)		Red SOS	Red & Blue Flash	Blue Flash	Red Flash
1800 lm	800 lm	350 lm	100 lm	20 lm		1800 lm	150 lm	80 lm	30 lm		15 lm	15 lm	15 lm	15 lm
2 h 19 min	3 h	5 h 34 min	22 h 39 min	101 h 54 min	/	6 h 2 min	6 h 13 min	15 h 44 min	86 h 35 min	Red SOS	51 h 7 min	31 h 28 min	30 h 26 min	55 h 13 min
										Red & Blue Flash		Blue Flash	Red Flash	Red Constant-on
										55 h 13 min		30 h 26 min	55 h 13 min	60 h 37 min

Size: 5.37" x 1.34" x 1.00"/136.4 x 34 x 25.4 mm

Weight: 6.53 oz/185 g (including battery)

Product ID: LD35R.11111

PD SERIES



Star Tactical Flashlights

The Fenix PD Series has become a classic since its release. It is deeply loved by users as being compact, portable, and multipurpose.



PD25R

Portable Rechargeable Flashlight

Black Sierra green

	800LM		250M		80H		IP68		1X16340 800mAh /1XCR123A
--	-------	--	------	--	-----	--	------	--	--------------------------



Max 800 lumens output and 250 meters beam distance.

Hidden USB Type-C charging port.

Included two-position body clip.

Simple and convenient operation with the tail switch and the side switch.

Size: 3.62" x 0.94" x 0.94"/92 x 24 x 24 mm


Weight: 2.75 oz/78 g (including battery)

Product ID: PD25R.11111, PD25R.14111

General Mode						Strobe
Turbo	High	Med	Low	Eco		
800 lumens	350 lumens	150 lumens	30 lumens	5 lumens	800 lumens	
55 minutes	1 hour 40 minutes	3 hours 30 minutes	20 hours 40 minutes	80 hours	/	

PD26R ACE

Multi-mode Portable Flashlight



NEW



Size: 4.17" x 1.05" x 0.97"/106 x 26.6 x 24.6 mm
Weight: 3.61 oz/102.3 g (including battery)
Product ID: PD26R.11111

- Innovative SET mode, three lighting options, and customizable Strobe mode.
- Max 1300 lumens output and 354 meters beam distance.
- Hidden USB Type-C charging port for convenient charging.
- Powered by a Fenix ARB-L18-1600 battery.
- Anti-roll and anti-slip body design.
- Included body clip for versatile attachment.

PD35 V3.0

High-performance Tactical Flashlight



HOT



Size: 5.28" x 1.00" x 0.90"/134 x 25.4 x 22.8 mm
Weight: 4.69 oz/133 g (including battery)
Product ID: PD35.11122
PD35.14122

Black Tropic green

PD32R

High-performance Rechargeable Tactical Flashlight



Size: 5.31" x 1.04" x 0.93"/135 x 26.5 x 23.6 mm
Weight: 4.80 oz/136 g (including battery)
Product ID: PD32R.11111
PD32R.17111

- Max 1400 lumens output and 344 meters beam distance.
- Powered by an included 3400mAh battery and compatible with two CR123A batteries.
- Hidden USB Type-C charging port.
- Soundless tail switch for instant activation, lockout function and instant strobe.

Black

Brunette

PD35R

Compact Rechargeable Tactical Flashlight



Size: 5.35" x 1.00" x 0.91"/136 x 25.4 x 23.2 mm
Weight: 4.94 oz/140 g (including battery)
Product ID: PD35R.11111

- Max 1700 lumens output.
- Luminus SFT40 LED with max 353 meters beam distance.
- Inner waterproof USB Type-C charging port.
- Dual tail switch.
- Compact size ensures a comfortable grip.



PD35R ACE

Multi-mode Tactical Flashlight



NEW



Size: 5.53" x 1.04" x 0.93"/140.5 x 26.5 x 23.6 mm
Weight: 5.11 oz/145 g (including battery)
Product ID: PD35R.11112

- Innovative SET mode, three lighting options, and customizable Strobe mode.
- Max 2000 lumens output and 380 meters beam distance.
- Hidden USB Type-C charging port for convenient charging.
- Powered by a Fenix ARB-L18-4000 battery, compatible with two CR123A batteries.
- Anti-roll and anti-slip body design.
- Included body clip for versatile attachment.

PD36R V2.0

Compact Rechargeable Tactical Flashlight

- Max 1700 lumens output and 396 meters beam distance.
- USB Type-C charging port supports 18W fast charging.
- Tactical tail switch for instant activation; side switch for brightness level selection.
- Included two-way body clip for versatile attachment.
- Powered by an included 5000mAh high-capacity battery, ensuring long-lasting runtime.

HOT



Size: 5.54" x 1.04" x 1.00"/140.7 x 26.5 x 25.5 mm
Weight: 5.89 oz/167 g (including battery)
Product ID: PD36R.11115

PD36R ACE

Multi-mode Tactical Flashlight

- Innovative SET mode, three lighting options, and customizable Strobe mode.
- Max 3000 lumens output and 415 meters beam distance.
- Hidden USB Type-C charging port for convenient charging.
- Powered by a Fenix ARB-L21-5000 V2.0 battery.
- Anti-roll and anti-slip body design.
- Included body clip for versatile attachment.

NEW



Size: 5.75" x 1.18" x 1.02"/146 x 30 x 26 mm
Weight: 6.41 oz/181.6 g (including battery)
Product ID: PD36R.11117

PD36 TAC

Mechanical Tactical Flashlight

- Max 3000 lumens output and 274 meters beam distance.
- Powered by a Fenix ARB-L21-5000U rechargeable battery.
- Tactical mode, Lockout/off mode, and Duty mode for different environments.
- Mechanical toggle switch remains unaffected by magnetic interference, enabling effortless mode switching.
- Dual-function tactical switch to accurately activate the tactical function.
- Lockout function avoids accidental activation.



Size: 5.51" x 1.04" x 1.00" / 140 x 26.5 x 25.4 mm
Weight: 3.24 oz / 92 g (excluding battery)
Product ID: PD36.11111

PD36R Pro

Heavy-duty Rechargeable Tactical Flashlight



Max 2800 lumens output and 380 meters beam distance.

Instant strobe and activation with the dual tail switch.

Advanced Pulse-Frequency Transmission System (APF).

Size: 5.74" x 1.04" x 1.01 "/145.8 x 26.5 x 25.7mm
Weight: 5.96 oz/169 g (including battery)
Product ID: PD36R.11113, PD36R.22113

Turbo	High	Med	Low	Eco	Strobe
2800 lumens	1000 lumens	350 lumens	150 lumens	30 lumens	2500 lumens
3 hours 30 minutes	3 hours 55 minutes	8 hours 15 minutes	19 hours	42 hours	/

PD40R V3.0

Super Bright Mechanical Rotary Switching Flashlight

- Max 3000 lumens output and 500 meters beam distance.
- Powered by a single Fenix ARB-L21-5000 V2.0 battery.
- Patented technique of rotary mode selection switching for accurate operation.
- Standard USB Type-C charging port.
- Capable of tail standing.

Utility Model Patent: ZL 201821227065.X

HOT



3000LM 500M 89H IP68 1X21700 5000mAh

Size: 5.63" x 1.34" x 1.02" / 143 x 34 x 26 mm
Weight: 6.98 oz / 198 g (including battery)
Product ID: PD40R.11113

PD55R

Outdoor High-performance Spot-and floodlight Flashlight

NEW



7500LM 30M 60H IP68 2x21700 6000mAh

Size: 5.87" x 2.32" x 1.18"/149 x 59 x 30 mm
Weight: 11.57 oz/328 g (excluding batteries)

- White light, red light, and UV light.
- Powered by two replaceable ARB-L21-6000 batteries.
- USB Type-C charging.
- Simple and fast operation with the ergonomic toggle switch.
- Press to release the battery cover for easy replacement.
- Unique rectangular design, differs from traditional cylindrical design flashlights.



PD45R ACE

Multi-mode Tactical Flashlight

3200LM 410M 57H IP68 1X21700 6000mAh



Max 3200 lumens output and 410 meters beam distance.

Tactical tail switch and mode selector ring allow for fast switching among General mode, Lockout mode, and SET mode.

Hidden USB Type-C charging port with inner waterproof treatment supports 18 W fast charging.

Innovative SET mode allows for customization of six output combinations.

Size: 6.21" x 1.18" x 1.02"/157.7 x 30 x 25.9 mm
Weight: 7.07 oz/200.5 g (including battery)
Product ID: PD45R.11111

Turbo	Ultrahigh	High	Med	Low	Eco	Strobe
3200 lumens	1400 lumens	600 lumens	300 lumens	100 lumens	30 lumens	3200 lumens
2 hours 20 minutes	3 hours 20 minutes	5 hours 30 minutes	9 hours 30 minutes	30 hours	57 hours	/



TK SERIES



Flashlights TK series

TK05R

Portable Tactical EDC Flashlight

- Inner waterproof USB Type-C charging port.
- Instant strobe.
- Max 1000 lumens output and 450 meters beam distance.
- Powered by one Fenix ARB-L18-1100 rechargeable battery.



Size: 4.53" x 1.26" x 0.93" / 115 x 32 x 23.5 mm
Weight: 4.37 oz / 124 g (including battery)
Product ID: TK05R.11111



TK11R

Compact Military And Duty Flashlight

- Max 1600 lumens output and 420 meters beam distance.
- Uses one Luminus SFT40 LED with a lifespan of 50,000 hours.
- Powered by a single 18650 rechargeable battery.
- Inner waterproof USB Type-C charging port.
- One-handed operation with the dual tail switch.
- Instant strobe.



Size: 5.73" x 1.34" x 0.93" / 145.5 x 34 x 23.5 mm
Weight: 4.14 oz / 117.5 g (excluding battery)
Product ID: TK11R.11111



TK15R

Intelligent Light-sensing Tactical Flashlight

- Max 3100 lumens output and 450 meters beam distance.
- Intelligent light-sensing mode automatically makes adjustments based on the surrounding lighting conditions.
- Instant activation and ON/OFF with the dual-function tactical switch.
- Toggle switch and functional switch allow for seamless switching among Intelligent light-sensing mode, Lockout mode, and Duty mode.
- USB Type-C charging and battery level indication.

NEW



3100LM | 450M | 31H | IP68 | 1X21700 5000mAh

Size: 6.02" x 1.36" x 1.42" / 152.89 x 34.50 x 36 mm
Weight: 7.34 oz/208 g (including battery)

TK16 V2.0

Dual Tail Switch Tactical Flashlight

- Max 3100 lumens output.
- Advanced Pulse-Frequency Transmission System (APF).
- Instant activation and strobe with the dual tail switch.
- Compact structure with a single-layer body.
- Stainless steel strike bezel inlaid tungsten steel breaking tips.

HOT



3100LM | 380M | 43.3H | IP68 | 1X21700 5000mAh

Size: 5.63" x 1.34" x 1.00" / 143 x 34 x 25.4 mm
Weight: 3.95 oz / 112 g (excluding battery)
Product ID: TK16.11112
TK16.14113

TK17

Dual Tail Switch Tactical Flashlight

- Max 3600 lumens output and 330 meters beam distance.
- Powered by a single ARB-L21-6000B high-capacity battery.
- Instant burst and strobe with the dual tail switch.
- Stainless steel strike bezel inlaid with three tungsten steel breaking tips.

NEW



3600LM | 330M | 60H | IP68 | 1X21700 6000mAh

Size: 5.85" x 1.42" x 1.00" / 148.5 x 36 x 25.4 mm
Weight: 6.96oz/197.2 g(excluding battery)
Product ID: TK17.11111

TK20R V2.0

Rechargeable Dual Rear-switch Multipurpose Flashlight

3000LM | 475M | 48H | IP68 | 1X21700 5000mAh

STAR TACTICAL FLASHLIGHT



- Instant strobe.
- Inner waterproof port.
- Dual tactical tail switch.
- Hidden USB Type-C charging port.

Utility Model Patent: ZL 201920500579.6
Size: 6.02" x 1.34" x 1.00" / 152 x 34 x 25.4 mm
Weight: 7.20 oz/204 g (including battery)
Product ID: TK20R.11113

Turbo	High	Med	Low	Eco	Strobe
3000 lumens	1000 lumens	350 lumens	150 lumens	30 lumens	3000 lumens
2 hours 50 minutes	3 hours 10 minutes	7 hours	21 hours 20 minutes	48 hours	/

TK21R

Law Enforcement And Duty Flashlight

3600LM | 480M | 72.5H | IP68 | 1X21700 6000mAh

NEW



Size: 6.04" x 1.42" x 1.00"/153.5 x 36 x 25.4mm
Weight: 7.81oz/221.4g (including battery)
Product ID: TK21R.11111

TK22R

Tactical And Duty Flashlight

3200LM | 480M | 50H | IP68 | 1X21700 5000mAh



Size: 6.22" x 1.57" x 1.00" / 158 x 40 x 25.4 mm
Weight: 7.69 oz / 218 g (including battery)
Product ID: TK22R.11111

Utility Model Patent: ZL 202321315946.8

TK22R ACE

3-in-1 High-performance Flashlight

4800LM | 350M | 70H | IP68 | 1X21700 6000mAh

NEW



Size: 6.10" x 1.57" x 1.00"/155 x 40 x 25.4 mm
Weight: 7.76 oz/220 g (including battery)

- Utilizes four Luminus SST25 LEDs.
- Max 4800 lumens output and 350 meters beam distance.
- Powered by a single ARB-L21-6000 mAh battery.
- Hidden USB Type-C port supports 18W fast charging.
- Output selection, instant strobe, lockout function, and SET mode customization with the dual tail switch and the toggle switch.
- IP68-rated protection.

TK28R

Multi-beam High-performance Flashlight

6500LM | 450M | 102H | IP68 | 2x18650 4000mAh



Lockable break-action battery compartment allows for fast battery replacement.

Instant turbo, strobe, red flash with the dual tail switch.

Mode switching with the tail toggle switch.

Battery level indication.

USB Type-C charging.

Slide port cover protects the USB Type-C port against dust and water ingress.

Turbo	High	Med	Low	Eco	Strobe	Red light (High)	Red light (Med)	Red light (Low)	Red flash
6500 lm	2000 lm	800 lm	150 lm	30 lm	3000 lm	260 lm	100 lm	10 lm	10 lm
3 h 20 min	4 h	4 h 40 min	31 h 30 min	102 h	/	7 h 45 min	21 h 30 min	111 h	/

Size: 5.82" x 2.01" x 1.26"/147.83 x 51 x 32 mm
Weight: 12.64 oz/358.3 g (including batteries)
Product ID: TK28R.11111

TK25R

Multifunction Law Enforcement And Duty Flashlight



NEW

- Utilizes one Cree XHP50.3- LED.
- Max 3600 lumens output and 350 meters beam distance.
- Equipped with a multi-LED system featuring high-power tactical light, wide side light, UV light, red light, red flashing light, and red-and-blue flashing light.
- Simple operation with the dual tail switch and the toggle switch.
- Instant turbo, strobe, and activation.
- USB Type-C fast charging; 1.5 hours from depletion to fully charged.
- Compatible with the ALC-03 quick-pull holster.



Size: 6.46" x 1.42" x 1.03"/164 x 36 x 26.2 mm
Weight: 7.94 oz/225 g (including battery)
Product ID: TK25R.11111

TK26R

High-performance Rechargeable Work Flashlight



- Max 1500 lumens output and 350 meters beam distance.
- Red, white, and green light sources.
- Instant strobe with the dual tail switch.
- Inner waterproof USB Type-C charging port.



Size: 5.91" x 1.57" x 1.00" / 150 x 40 x 25.4 mm
Weight: 5.54 oz/157 g (excluding battery)
Product ID: TK26R.11112



TK35R

High-performance Multi-mode Tactical Flashlight



Max 5800 lumens output and 610 meters beam distance.
365nm UV LED for improved tactical applications.
Instant turbo and strobe with the dual tail switch.
Included two 18650 batteries provide long-lasting runtime.
USB Type-C charging port supports fast charging.

Size: 6.06" x 1.69"/154 x 43 mm Weight: 12.06 oz/342 g (including batteries)
Product ID: TK35R.11111

Turbo	High	Med	Low	Eco	Strobe	UV High	UV Low
5800 lm	2000 lm	800 lm	350 lm	30 lm	3000 lm	3 W	1.5 W
3 h	3 h 15 min	4 h	9 h 20 min	105 h	/	7 h 30 min	14 h 30 min

TK30R

White Laser Tactical Flashlight

- Max 500 lumens output and 1500 meters beam distance.
- White laser light source.
- Tactical tail switch for instant activation and instant strobe.
- Hidden USB Type-C charging port.
- Toggle switch for output selection and lockout function.



500LM | 1500M | 8H50Min | IP68 | 1X21700 6000mAh

Size: 7.24" x 1.00" x 1.57"/184 x 25.4 x 40 mm
Weight: 8.82 oz/250 g (including battery)
Product ID: TK30R.11111

TK35UE V2.0

High-performance Dual Mode Tactical Flashlight

- Patented toggle switch for the selection of tactical and duty modes.
- Max 5000 lumens output.
- Dual tactical tail switch.
- Instant strobe.
- The light can be powered by two 18650 or two CR123A batteries in emergency situations.



5000LM | 400M | 85H | IP68 | 2X18650 /4XCR123A

Size: 5.63" x 1.69"/ 143 x 43 mm
Weight: 7.13 oz / 202 g (excluding batteries)
Product ID: TK35.11122

Utility Model Patent: ZL 201721574627.3



HT SERIES

HT18R V2.0

Multi-mode Outdoor Long-range Flashlight

NEW

- Max 3700 lumens output and 1100 meters beam distance.
- Utilizes one Luminus SFT90 LED with a lifespan of 50,000 hours.
- Powered by a Fenix ARB-L21-6000 battery.
- Slide anti-dust cover.
- Inner waterproof USB Type-C charging port.
- Instant turbo and strobe with the dual side switch.
- Professional SOS and Beacon modes for outdoor emergencies.
- Boot-up battery level indication and low-voltage warning.



3700LM | 1100M | 87H | IP68 | 1X21700 6000mAh

Size: 7.86" x 2.68" x 1.00"/199.7 x 68.04 x 25.42 mm
Weight: 12.64 oz/358.2 g (including battery)
Product ID: HT18R.11112

HT32

Outdoor Hunting Flashlight

- Max 2500 lumens output and 640 meters beam distance.
- Fitted with one Luminus SFT20 CG green light LED and one SFT20 RA red light LED.
- Patented TIR lens doubles the beam distance with its diameter reduced by 30%.
- One-handed operation with the dual tail switch.
- Instant strobe.

Utility Model Patent: ZL 202222108357.5



Size: 6.30" x 2.05" x 1.00" / 160 x 52 x 25.4 mm
Weight: 6.53 oz / 185 g (excluding battery)
Product ID: HT32.11111

HT32R

Multi-LED High-performance Hunting Flashlight

- Utilizes one Luminus SFT42R LED, three Luminus SST20 LEDs, and six OSRAM ostar LEDs.
- Powered by a Fenix ARB-L21-6000 high-capacity battery.
- Slide anti-dust cover.
- USB Type-C port supports fast charging.
- Instant spotlight, instant strobe, and other functions with the side tactical switch.
- Mode switching with the side toggle switch.
- Compatible with the AER-05 and the ALG-18.

NEW



Size: 6.30" x 2.05" x 1.00" / 160 x 52 x 25.4 mm
Weight: 6.53 oz / 185 g (excluding battery)



LR SERIES



LR35R



LR35R Pro



LR36R



LR40R V2.0



LR50R



LR60R



LR80R

LR35R

Powerful Mid-size Searching Flashlight

- Max 10000 lumens output and 500 meters beam distance.
- Mid-size body for one-handed grip.
- Lockout function avoids accidental activation.
- 90° beam angle with incredible broad beam improves searching efficiency.



Size: 5.51" x 2.03" x 1.83"/140 x 51.5 x 46.5 mm
Weight: 8.43 oz/239 g (excluding battery)
Product ID: LR35R.11111

LR35R Pro

Super Bright Palm-sized Searching Flashlight

- Max 10000 lumens output and 500 meters beam distance.
- Floodlight and spotlight for long-range illumination and close-up illumination.
- Stepless brightness regulation, mode switching, Strobe mode, and lockout function with the toggle switch and the electronic switch.
- USB Type-C charging port; 18W fast charging and discharging.
- Mid-size light body for easy carry.
- UV light and red light for different applications.



Size: 5.63" x 2.17" x 1.83"/143 x 55 x 46.5 mm
Weight: 16.12 oz/457 g (including batteries)
Product ID: LR35R.11112

LR36R

White Laser Powerful Mid-size Searching Flashlight

- White laser and floodlight for long-range illumination and close-up illumination.
- OLED smart display shows the remaining runtime, brightness level, and battery level.
- Stepless brightness regulation for smooth and accurate control of brightness level.
- Toggle switch and electronic switch combo for convenient and efficient operation.
- Toggle switch lockout function avoids accidental activation.



Size: 6.33" x 2.21" x 2.17"/160.7 x 56.2 x 55.1 mm
Weight: 17.39 oz/493 g (including batteries)
Product ID: LR36R.11111

LR40R v2.0

Super Bright Spot-and-flood Searching Flashlight

- Max 15000 lumens output and 900 meters beam distance.
- Rotary toggle switch + electronic switch for single-handed operation.
- Spotlight, floodlight and combined modes for different lighting demands.
- USB Type-C port supports 18W fast charging and USB-A port supports discharging.



Size: 6.89" x 3.23" x 2.17" / 175 x 82 x 55 mm
Weight: 29.72 oz / 842.5 g (including battery)
Product ID: LR40R.11112



LR50R

Multifunctional Super Bright Searching Flashlight

- Max 12000 lumens output and 950 lumens beam distance.
- Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- Instant Turbo activation rapidly responds to emergency situations.
- USB Type-C charging and discharging interface supports fast-charging protocols.



12000LM 950M 58H IP68 3.6V/16000mAh /1-4X21700

Size: 6.42" x 3.46" x 2.36" / 163 x 88 x 60 mm
Weight: 34.8 oz / 986 g (including battery)
Product ID: LR50R.11111

LR80R

Super Bright Handheld Searching Flashlight

- High output, far-reaching beam shot, long-lasting runtime for wide-range searching lighting.
- Dual switch respectively controls dual mode.
- Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- Multiple wearing ways: hand-held, one-handed grip, back it on the shoulder.
- Can be used as a power bank for external digital devices.

HOT



18000LM 1130M 300H IP68 7.2V/12000mAh

Size: 10.20" x 4.25" x 2.13" / 259 x 108 x 54 mm
Weight: 57.71 oz / 1636 g (including battery)
Product ID: LR80R.11115, LR80R.11112, LR80R.11113, LR80R.11111, LR80R.11114



LR60R

Mechanical Rotary Searching Flashlight

21000LM 1085M 113H IP68 14.4V/4000mAh



Mechanical rotary switch for rapid brightness and mode selection.

OLED screen displays brightness level, remaining runtime and remaining battery level.

Multiple wearing ways: hand-held, one-handed grip, back it on the shoulder.

Size: 8.19" x 3.59" x 2.46"/208 x 91 x 62.5 mm
Weight: 52.91 oz/1500 g (including battery)
Product ID: LR60R.11111

Search Mode(Long range searching)					Camp Mode(Large area lighting)				
Turbo	High	Med	Low	Eco	Med	High	Turbo	SOS	Strobe
Spot-and-floodlight	Spotlight				Floodlight				Spotlight
21000 lumens	3000 lumens	1000 lumens	300 lumens	50 lumens	2000 lumens	6000 lumens	15000 lumens	300 lumens	9000 lumens
1 hour 50 minutes	3 hours 45 minutes	10 hours 40 minutes	24 hours 20 minutes	113 hours	5 hours 25 minutes	3 hours	2 hours 10 minutes	/	/

S SERIES



Flashlights S Series

SW05R-RED

Multipurpose Clip-on Light



ISPO
Award
2024



- Included body clip is designed to accommodate various widths for secure attachment.
- White and red light sources.
- 200° adjustable head for use at different angles.
- Inner waterproof USB Type-C charging port.
- Magnetic tail for hands-free use.

Black Military green



Size: 3.20" x 1.38" x 0.71"/81.2 x 35 x 18 mm
Weight: 1.94 oz/55 g (including battery)
Product ID: SW05R-RED.11111
SW05R-RED.14111

SW06R

Multipurpose Clip-on Light

NEW



- Max 500 lumens output and 100 meters beam distance.
- White light, UV light, red light, and blue light.
- 200° adjustable head for use at different angles.
- Included two-way body clip and magnetic tail for hands-free use.
- Inner waterproof USB Type-C charging port.



Size: 3.90" x 1.54" x 0.79"/99 x 39 x 20 mm
Weight: 3.17 oz/90 g (including battery)
Product ID: SW06R.11111

SW05R-UV

Multipurpose Clip-on Light




- Included body clip is designed to accommodate various widths for secure attachment.
- White and UV light sources.
- 200° adjustable head for use at different angles.
- Inner waterproof USB Type-C charging port.
- Magnetic tail for hands-free use.

Black Military green



Size: 3.20" x 1.38" x 0.71"/81.2 x 35 x 18 mm
Weight: 1.94 oz/55 g (including battery)
Product ID: SW05R-UV.11111
SW05R-UV.14111

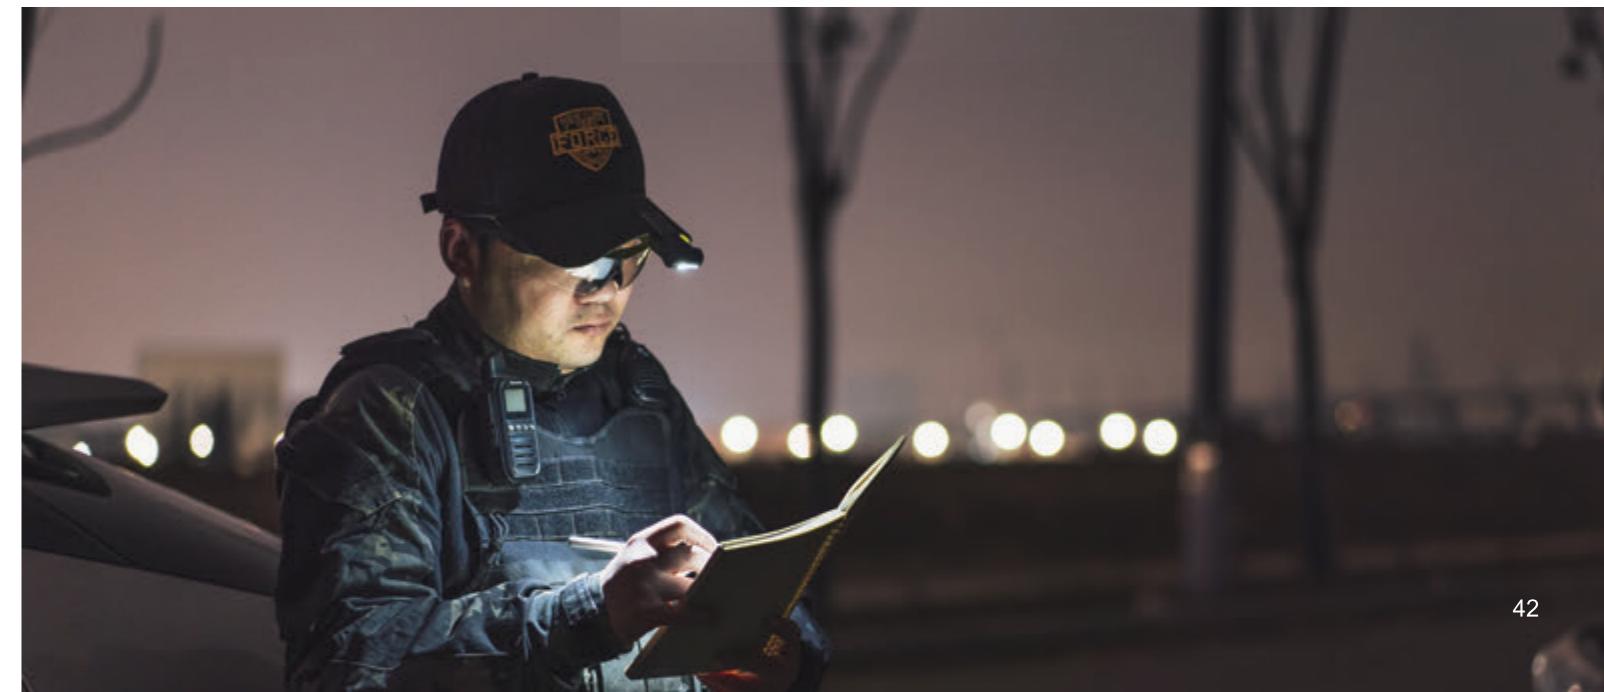

WF SERIES



Flashlights WF Series

WF25RM

Multifunctional Cradle Charging Duty Flashlight

- Max 3000 lumens output and 370 lumens beam distance.
- 365nm UV light for non-destructive testing, leak testing, and other specialized operations.
- Proximity downshift safety function to avoid danger caused by high temperatures.
- Rechargeable with the included magnetic charging cradle, which is also compatible with the WF26R flashlight.
- Tail hook allows for easy and hands-free carrying.



Size: 7.17" x 1.57" x 1.57" / 182 x 40 x 40 mm
Weight: 8.80 oz/249.5 g (including battery)
Product ID: WF25RM.11111

WF26R

High-performance Cradle Charging Duty Flashlight

- Max 3000 lumens output and 450 meters beam distance.
- The magnetic charging cradle can be separated from the magnetic charging cable.
- Instant activation and instant strobe with dual tail switch.
- Boot-up battery level indication and low-voltage warning.



Size: 6.14" x 1.59" x 1.05" / 156 x 40.4 x 26.6 mm
Weight: 7.83 oz / 222 g (including battery)
Product ID: WF26R.11111



WF05E



WF11E



WF25RM



WF26R

NEW



WF30RE





PROFESSIONAL EXPLOSION-PROOF FLASHLIGHTS

The Fenix explosion-proof flashlights are designed and manufactured in accordance with the international explosion-proof standard of the IECEx system, which has passed the necessary tests and was certified by IECEx, ATEX and CSA. Thus these products can be safely used in explosive gas and dust atmospheres, users feel relieved when working in flammable and explosive places.

WF05E

Intrinsically Safe Flashlight
(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)



Size: 5.29" x 0.75" x 0.59" / 134.5 x 19 x 14.9 mm
Weight: 1.34 oz / 38 g (excluding batteries)
Product ID: WF05E.11112

WF11E

Magnetic Explosion-proof Flashlight
(Can be safely used in Zone 0, Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 20, Zone 21 and Zone 22 as well)



Size: 6.59" x 1.93" x 0.94" / 167.5 x 49 x 24 mm
Weight: 5.64 oz / 160 g (excluding batteries)
Product ID: WF11E.15117, WF11E.15116

WF30RE

Intrinsically Safe Flashlight



Intrinsically explosion-proof.

Utilizes one CREE XP-G3 LED with a lifespan of 50,000 hours.

Max 300 lumens output.

Powered by a single Fenix ARB-L21-3000Ex rechargeable battery.

USB Type-C charging port.

It has passed the necessary tests and was certified by IECEx, ATEX, and Chinese Explosion-proof Certification.

Boot-up battery level indication and low-voltage warning.

Size: 5.97" x 1.34" x 1.10" / 151.7 x 34 x 28 mm
Weight: 7.69 oz / 218 g (including battery)
Product ID: WF30RE.11125, WF30RE.11126, WF30RE.11127, WF30RE.11128, WF30RE.11129

High	Med	Low	Eco	SOS
300 lumens	100 lumens	30 lumens	5 lumens	30 lumens
7 hours 18 minutes	22 hours 53 minutes	68 hours	313 hours 22 minutes	/

WT SERIES



WT16R

Multipurpose And Rechargeable Work Light

- Combines spotlight, floodlight and yellow flash in one.
- Super magnets are placed in the back and tail of the light for metal connection.
- Widened stainless steel body clip for firm connection to pack and pocket.
- Battery level indication for instant checking of remaining battery level.



300LM | 115M | 30H | IP66 | 1X2000mAh

Size: 5.00" x 1.46" x 1.02"/127 x 37 x 26 mm
Weight: 4.55 oz/129 g (including battery)
Product ID: WT16R.11111

WT25R

Rechargeable Pivoting Work Light

- Max 1000 lumens output and 220 meters beam distance.
- 105° adjustable head for use at different angles.
- Magnetic tail for hands-free use.
- Magnetic charging with the included magnetic charging cable.



1000LM | 220M | 29H | IP66 | 1X18650 3400mAh

Size: 5.33" x 1.16" x 0.95" / 135.3 x 29.4 x 24.1 mm
Weight: 4.83 oz / 137 g (including battery)
Product ID: WT25R.11111

HEADLAMPS

HL / HM / HP / WH

Fenix headlamps have an unequaled fit and finish. Our headlamps provide essential lighting for hikers, runners, campers and hunters, and are reliable light sources for many industrial workers. Fenix applies its years of LED experience to the crafting of ultra-bright headlamps that are comfortable to wear and easy to use in a variety of conditions. Whether your adventures or works need ultra-light all-day comfort or high-performance lighting for an extended expedition, the Fenix Headlamp series has a lamp for the occasion. Grab a Fenix headlamp for hands-free illumination.



HL SERIES



Headlamps HL Series

HL12R V2.0

Outdoor Ultralight Rechargeable Headlamp

	500LM		125M		112H		IP66		950mAh
--	-------	--	------	--	------	--	------	--	--------

- White and red light sources.
- Dual top switch for fast and easy operation.
- USB Type-C charging port ; battery level indication ; low-voltage warning.
- Electronic lockout function avoids accidental activation.
- High-quality aluminum alloy front case offers great durability and thermal performance.

Gun grey Purple



Size: 2.20" x 1.57" x 1.26"/56 x 40 x 31.9 mm
Weight: 2.56 oz/72.5 g (including battery and headband)
Product ID: HL12R.12112, HL12R.18112

HL16

Lightweight Outdoor Hiking Headlamp

	450LM		104M		100H		IP66		3XAAA
--	-------	--	------	--	------	--	------	--	-------



Size: 2.52" x 1.89" x 1.06" / 64 x 48 x 27 mm
Weight: 3.43 oz / 97.2 g (including battery)
Product ID: HL16.14111, HL16.11111, HL16.24111


HL17R

Multipurpose Quick-release Magnetic Headlamp

	500LM		100M		96H		IP66		1000mAh
--	-------	--	------	--	-----	--	------	--	---------



Size: 2.75" x 1.59" x 1.46"/69.9 x 40.4 x 37 mm (including mount)
2.67" x 1.42" x 1.17"/67.7 x 36 x 29.6 mm (excluding mount)
Weight: 2.29 oz/65 g (including battery)
Product ID: HL17R.11111, HL17R.20111

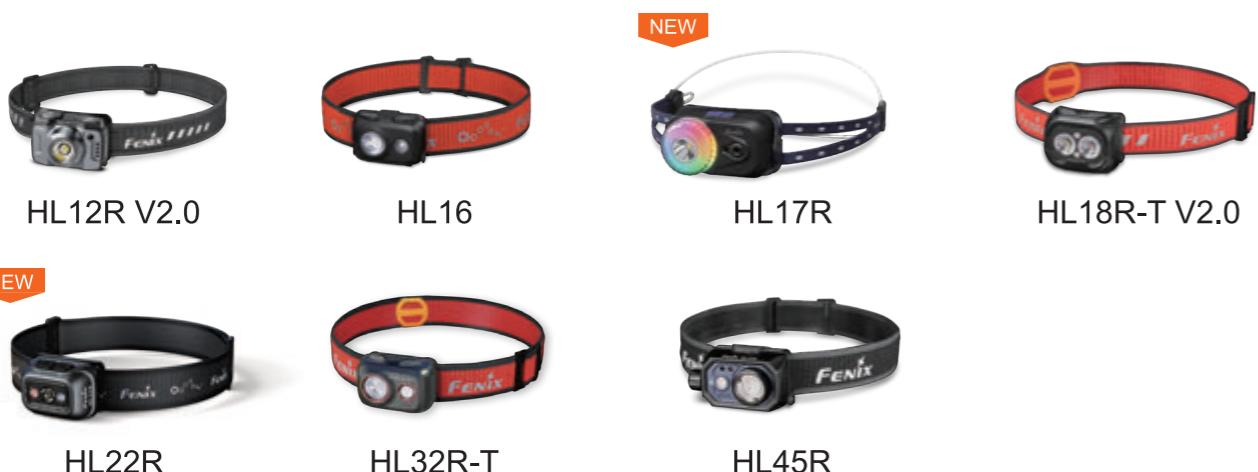

Black White

HL18R-T V2.0

Ultralight Trail Running Headlamp

- Max 800 lumens output and 125 meters beam distance.
- Cold white light, warm white light and red light.
- Lockout function avoids accidental activation.
- USB Type-C charging with battery level indication and low-voltage warning.
- Single-handed operation with the new two-way SPORT Headband Fit System.
- Emergency whistle.

Polar night black

Iceberg white



Size: 2.26" x 1.22" x 1.85"/57.5 x 31 x 47 mm
Weight: 3.63 oz/103 g (including battery and headband)
Product ID: HL18R-T.11112
HL18R-T.20113

HL22R

Multicolor Outdoor Headlamp

NEW



Size: 2.60" x 1.85" x 1.48"/66 x 47 x 37.5 mm
Weight: 3.17 oz/90 g (including battery)
Product ID: HL22R.11111



HL32R-T

High-performance Trail Running Headlamp

- Quality magnesium alloy material, lightweight and durable.
- Frequency sensing: the brightness changes along with the speed.
- Separately controlled spotlight and floodlight.
- Single-handed operation with the new SPORT Headband Fit System.

Black

Rose red

Dark blue



Size: 2.60" x 1.77" x 1.18"/66 x 45 x 30 mm
Weight: 3.77 oz / 107 g (including battery)
Product ID: HL32R-T.16111, HL32R-T.11111, HL32R-T.13111

HL45R

Multipurpose Focusable Induction Headlamp

- Rotary switch and electronic switch combination for lockout function, mode switching, and output selection.
- Rotatable focusing ring for switching between spotlight and floodlight.
- Gesture-sensing function - the headlamp can be turned on or off with a wave of the hand.
- USB Type-C charging.
- Powered by a 1900mAh battery and compatible with three AAA batteries.



Size: 3.08" x 1.97" x 1.75"/78.2 x 50 x 44.5 mm
Weight: 4.69 oz/133 g (including battery and headband)
Product ID: HL45R.11111



HM SERIES



Headlamps HM Series

HM23 V2.0

Multipurpose Ultralight Headlamp



Size: 2.90" x 1.42" x 1.18"/73.6 x 36 x 30 mm
Weight: 3.04 oz/86.3 g (including battery and headband)
Product ID: HM23.11114

HM50R V2.0

High-performance Dual-purpose Headlamp



Size: 2.52" x 1.42" x 1.26" / 64 x 36 x 32 mm
Weight: 2.75 oz / 78 g (including battery and headband)
Product ID: HM50R.11113



HM53R

Lightweight Multifunctional Headlamp

1200LM | 150M | 150H | IP68 | 1X1600mAh

NEW



Size: 2.79" x 1.44" x 1.42"/70.8 x 36.7 x 36 mm
Weight: 3.60 oz/102 g (including battery and headband)
Product ID: HM53R.11111

HM55R

Multi-LED Lightweight Outdoor Headlamp

1200LM | 175M | 147H | IP68 | 1X1600mAh

NEW



Size: 2.52" x 1.34" x 1.73"/64 x 34 x 44 mm
Weight: 3.70 oz/105 g (including battery and headband)
Product ID: HM55R.11111, HM55R.18113, HM55R.23112

Black | Nebula | Dark purple



HM60R V2.0

Outdoor High-performance Metal Headlamp

1600LM | 170M | 292H | IP68 | 1X4000mAh

NEW



Size: 3.46" x 1.80" x 1.77"/88 x 45.7 x 45 mm
Weight: 6.10 oz/173 g (including battery and headband)
Product ID: HM60R.11115

HM61R V3.0

Reliable Multifunction Headlamp

1800LM | 195M | 300H | IP68 | 1X4000mAh

NEW



Size: 4.15" x 1.50" x 1.77"/105.4 x 38 x 50.95 mm (including mount)
Weight: 5.91 oz/167.6 g (including battery and headband)
Product ID: HM61R.11122



I can chase bold goals and big adventures—day or night.



**Elite trail runner
from New Zealand**

1st place, HOKA Ultra-Trail Australia by UTMB 2025@UTA50

1st place, Tarawera Ultra-Trail by UTMB@2025 -T102

2nd place, HOKA Canyons Endurance Runs by UTMB 2024 - 50K

4th place, Western States Endurance Run 2024-Western States 100-Mile Endurance Run

4th place, HOKA UTMB Mont-Blanc 2024 - CCC

HM65R-T V2.0

Lightweight Magnesium Trail Running Headlamp

Black Nebula Dark purple

1600LM 170M 300H IP68 1X3400mAh

ONE CHARGING FOR 100M RUNNING

As more and more running lovers participate in trail running races, the requirements for headlamps are becoming more and more stringent. The Fenix HM65 series is highly praised by trail runners due to its high performance and long runtime. The slogan "One charging for 100km running" is therefore widely spread.



TWO-WAY SPORT HEADBAND
FIT SYSTEM

Quality magnesium material, lightweight and durable. Cold white and warm white light sources; max 1600 lumens output.

Single-handed operation with the new SPORT Headband Fit System.

Emergency whistle.

USB Type-C charging port.

Utility Model Patent: ZL 202321621763.9

Size: 3.15" x 1.84" x 1.37" / 80 x 46.8 x 34.9 mm

Weight: 4.94 oz/140 g (including battery and headband)

Product ID: HM65R-T.11114, HM65R-T.23115, HM65R-T.18116

	White Light			Warm White Light				SOS
	High	Med	Low	High	Med	Low	Eco	
1600 lumens	400 lumens	130 lumens	800 lumens	400 lumens	130 lumens	5 lumens	5 lumens	
3 hours	12 hours	24 hours	6 hours	12 hours	24 hours	300 hours	600 hours	

HM62-T

Lightweight Trail Running Magnesium Headlamp

- White and red light sources for different applications.
- Lightweight magnesium material.
- Single-handed operation with the new two-way SPORT Headband Fit System.
- Emergency whistle.
- Lockout function avoids accidental activation.



Size: 3.22" x 1.19" x 1.02"/81.8 x 30.2 x 26 mm
Weight: 4.41 oz / 125g (including battery)
Product ID: HM62-T.11111
HM62-T.22111

Black

Magma


HM65R

Dual Light Source Reliable Magnesium Headlamp

- Max 1000 lumens output.
- Separately controlled spotlight and floodlight.
- Dustproof, waterproof and impact-resistance.
- Quality aluminum, magnesium and PC material, lightweight and durable.
- USB Type-C fast charging.
- Electronic lockout function avoids accidental activation.



Size: 3.17" x 2.17" x 1.57" / 80.5 x 55 x 40 mm
Weight: 3.42 oz / 97 g (excluding battery)
Product ID: HM65R.11112

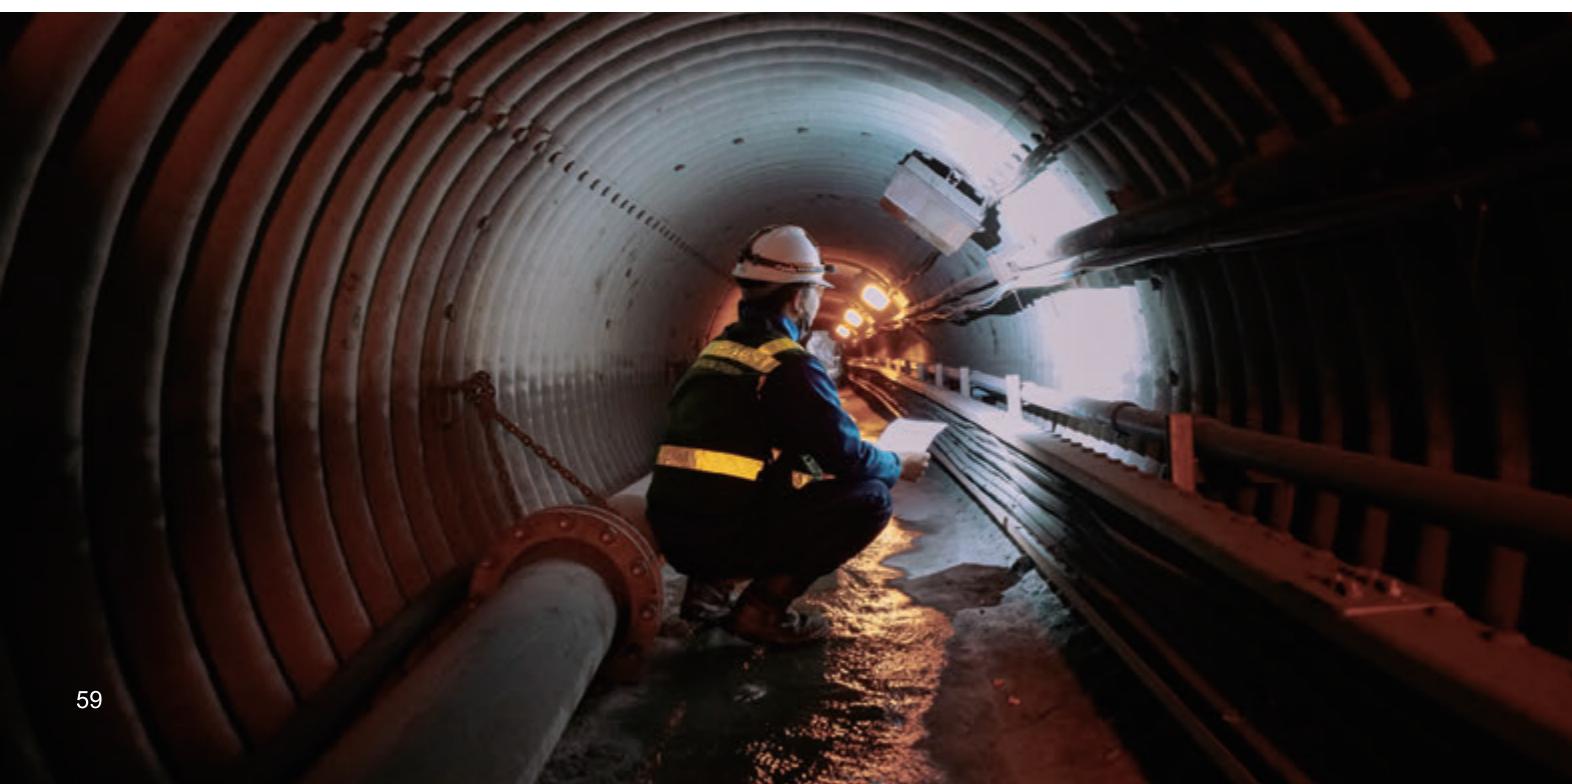

HM70R

Triple Light Source Rechargeable 21700-powered Headlamp



Included a 5000mAh battery with a 100 hours runtime.
Hidden USB Type-C charging port for convenient charging.

Large thumb-sized switch for easy and fast operation.
White, neutral white and red light sources for different applications.

Utility Model Patent: ZL 201720607070.2
Size: 3.72" x 2.01" x 1.81"/94.5 x 51 x 46 mm
Weight: 7.27 oz/206 g (including battery)
Product ID: HM70R.11111

General Mode				Functional Mode			
Turbo	High	Med	Low	Red	Med	High	SOS
1600 lumens	500 lumens	150 lumens	30 lumens	5 lumens	70 lumens	400 lumens	5 lumens
4 hours	6 hours	30 hours	100 hours	400 hours	48 hours	8 hours	800 hours

HM71R

High-performance Rechargeable Industrial Headlamp



Size: 4.17" x 1.81" x 1.77" / 106 x 46 x 45 mm
Weight: 7.32 oz / 207.5 g (including battery and headband)
Product ID: HM71R.11111

HM75R

Magnesium Separation Style Industrial Headlamp



Size: 3.59" x 1.61" x 2.11" / 91.1 x 41 x 53.5 mm
Weight: 11.32 oz / 321 g (including battery, battery case and headband)
Product ID: HM75R.11111

HM76R

High-performance Multi-LED Headlamp



Size: 3.86" x 1.93" x 2.05" / 98 x 49 x 52 mm
Weight: 7.91 oz / 224.3 g (including battery case, battery, and headband)
Product ID: HM76R.11111



HP SERIES



HP12R-T



HP16R



HP25R V2.0



HP30R V2.0



HP35R



HP35R SAR

HP12R-T

Separation Style Trail Running Headlamp

1300LM 200M 310H IP66 1X18650

NEW



Size: 2.40" x 1.46" x 1.10" / 61 x 37 x 28 mm
Weight: 7.02 oz / 199 g (including battery)
Product ID: HP12R-T.11111

Red

Black

HP16R

High-performance Rechargeable Outdoor Headlamp

1250LM 255M 300H IP66 1X300mAh / 4XAA



Size: 2.44" x 1.85" x 1.26" / 62 x 47 x 32 mm
Weight: 7.62 oz / 216 g (including battery and headband)
Product ID: HP16R.12111

- Max 1250 lumens output.
- Two power sources for free choice.
- USB Type-C charging port fast charging.
- Separately controlled dual switch; lockout function avoids accidental activation.
- Made of quality plastics and aluminum, integrated die-casting for better heat dissipation and safety performance.
- White, neutral white and red lights combined.

HP25R V2.0

Rechargeable Work Headlamp With Ultra-long Runtime

1600LM 290M 400H IP66 1X21700 / 1X18650



Size: 2.36" x 1.85" x 1.30" / 60 x 47 x 33 mm
Weight: 8.40 oz / 238 g (including battery and headband)
Product ID: HP25R.12113

- Max 1600 lumens output.
- Spotlight, floodlight, and red light combined.
- High-reliability aluminum offers excellent heat dissipation.
- USB Type-C charging.
- Powered by a 21700 battery and compatible with a 18650 battery.
- Lockout function avoids accidental activation.

HP30R V2.0

Ultrahigh-performance Separate Search&Rescue Headlamp

3000LM 270M 120H IP66 2X21700

HOT



Size: 3.62" x 2.20" x 1.73" / 92 x 56 x 44 mm
Weight: 15.41 oz / 437 g (including battery and headband)
Product ID: HP30R.11112

HP35R/HP35R SAR

Multiple Light Sources High-output Search&Rescue Headlamp

4000LM 450M 500H IP66 2X21700

HOT



Size: HP35R: 3.7" x 1.92" x 2.26" / 94.1 x 48.7 x 57.4 mm
HP35R SAR: 3.91" x 2.10" x 2.15" / 99.4 x 53.4 x 54.7 mm
Weight: HP35R: 15.27 oz / 433 g (including batteries and headband)
HP35R SAR: 16.79 oz / 476 g (including batteries and headband)
Product ID: HP35R.11111, HP35R.11112



WH SERIES



WH23R

Smart Induction Headlamp



- Max 600 lumens output and 100 meters beam distance.
- Spotlight, floodlight and combined output.
- Rotary switch for precise operation even with gloves.
- Gesture sensing for on/off.
- The center-rotating headlamp holder balances and improves the comfort of wearing.



Size: 3.40" x 1.77" x 1.72" / 86.45 x 45 x 43.72 mm
Weight: 4.06 oz / 115 g (including battery)
Product ID: WH23R.19111

WH35RE

Intrinsically Safe Headlamp

NEW

- Certified by IECEx and ATEX, and Chinese Explosion-Proof Certification.
- Can be safely used in explosive gas areas Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well.
- USB Type-C charging port.
- Right-angled lighting; can be used as a flashlight.
- Boot-up battery level indication and low-voltage warning.



Size: 4.41" x 1.77" x 1.79" / 112 x 45 x 45.5 mm
Weight: 5.40 oz / 153 g (including battery)
Product ID: WH35RE.11111, WH35RE.11112, WH35RE.11113, WH35RE.11114, WH35RE.11115

GL SERIES



TACTICAL LIGHTS

Fenix's newly developed professional tactical light series. Using advanced technology to create a compact high-performance tactical light suitable for full-size guns. It has super-strong white light and long-range beam, which is capable of fast and accurate aiming in low-light environments. It is suitable for all kinds of law enforcement, personal defense, competitive shooting, hunting, etc.



GL06/GL06-365



GL07



GL19R V2.0



GL22



GL23R



GL30R

GL23R

Green Laser Tactical Light

	1200LM
	240M
	13H
	IP66
	1X18350



Precise green laser sight.

Tail switches can be replaced based on the user's preferences.

USB Type-C charging port.

Ambidextrous mechanical tail switches for instant activation.

Size: 3.43" x 1.18" x 1.69"/87 x 30 x 43 mm
Weight: 4.23 oz/120 g (including battery)
Product ID: GL23R.11111 GL23R.11112

White Light	White Light + Green Laser	Green Laser
1200 lumens	1200 lumens + 520nm green laser \leq 5mW	520nm green laser \leq 5mW
1 hour	1 hour	13 hours

GL06 / GL06-365

Pocket Pistol Tactical Light

- GL06 is specifically designed for guns with both Glock universal rail and Picatinny rail.
- GL06-365 is specifically designed for guns with SIG-Sauer P365 rail, P365 XL rail or other rails. (SIG-Sauer P365 rail, P365X rail, P365-380 rail, P365XL rail, P365 SAS rail, and other types of rail with the same size)
- QD lever for quick install and quick detach.
- Instant strobe.
- Dual tail switch for fast, single-handed operation.



Size: 2.40" x 1.11" x 0.93" / 61 x 28.15 x 23.5 mm
Weight: GL06: 2.43 oz/69.1 g (including battery)
GL06-365: 2.45 oz/69.4 g (including battery)
Product ID: GL06.11111, GL06.11112



GL07

Compact High-output Light

NEW

- Uses a Luminus SFT12R LED with a lifespan of 50,000 hours.
- Powered by an included ARB-L16-800UP rechargeable battery and compatible with a CR123A battery.
- Quick-release structure for quick installation and removal.
- Modular quick-release sliding rail ensures the light can slide back and forth.
- Fitted with Fenix's patented ultra-thin optical lens.
- Fast activation of strobe.
- Two-handed operation with the dual tail switch.



Size: 2.61" x 1.11" x 1.24" / 66.3 x 28.22 x 31.58 mm
Weight: 2.61 oz/74 g (including battery)
Product ID: GL07.11111



GL30R

High-performance Long-range Tactical Light



In-Line M1913, Off-Set M1913



Off-Set M-LOK



Utilizes a Luminus SFT12R LED.

Powered by an included ARB-L18-4000 battery.

USB Type-C port supports charging and can be used as a remote pressure switch interface.

Included are a Picatinny clamp, an M-Lok clamp, and an AER-07 remote pressure switch.

Lockout function avoids accidental activation.

Ambidextrous tail switch.

Size: 5.76" x 1.42" / 146.4 x 36 mm
Remote pressure switch: 2.66" x 1.16" x 0.88" / 67.6 x 29.4 x 22.3 mm
Weight: 7.62 oz/216 g (excluding battery)

GL19R V2.0

High-intensity Rechargeable Tactical Light

- ★ Ambidextrous mechanical rear switches for instant activation.
- ★ Digitally regulated circuit for maintaining a stable output.
- ★ Reverse polarity protection, to protect from improper battery insertion.
- ★ Toughened ultra-clear glass lens with an anti-reflective coating.



1200LM | 420M | 55MIN | IP66 | 1X18350

Size: 3.70" x 1.22" x 1.25"/94 x 31 x 32 mm
Weight: 4.20 oz/119 g (including battery)
Product ID: GL19R.11111

GL22

Red Laser Tactical Light

- ★ Max 750 lumens output and 180 meters beam distance.
- ★ Precise red laser sight.
*Laser parameters: CLASS 3R laser product, laser wavelength 640-660nm, laser optical power output <5mW.
- ★ Design for guns with tactical rails.
- ★ Two-handed operation with dual tactical tail switch.
- ★ Instant strobe.



750LM | 180M | 20H | IP66 | 1X300mAh /1XCR123A

Size: 2.64" x 1.65" x 1.22" / 67 x 42 x 31 mm
Weight: 3.32 oz / 94 g (including battery)
Product ID: GL22.11111



BC SERIES



BICYCLE LIGHTS

With a **Fenix bicycle light**, you can expect the best and the brightest, with practical features, no matter where your bike takes you. From deserted night-time trails to urban environments, a Fenix bicycle light helps you see and be seen in the park so you remain safe on your cycling adventure. No matter where your cycling takes you, you can depend on a Fenix bike light to illuminate your way.



BC05R V2.0

BC06R

BC15R

BC22R

BC25R

HOT



BC26R

NEW



BC28R

HOT



BC30 V2.0

NEW



BC45R

BC05R v2.0

Ultra-compact Rechargeable Bicycle Taillight

- Max 15 lumens output and 50 meters alerting distance.
- Battery level indication.
- USB Type-C charging.
- Matched with the body clip, can be used as a backpack light, or chest light.
- Single switch for easy and fast control.



Size: 2.01" x 0.87" x 0.87" / 51 x 22 x 22 mm
Weight: 0.99 oz / 28 g (including battery)
Product ID: BC05R.11113

BC06R

Smart Brake-sensing Bicycle Taillight

- Smart brake sensing function.
- Max 90 lumens output and 100 meters alerting distance.
- Can be mounted on saddle rails or seatposts.
- Quick-release structure for fast assembly and disassembly.
- USB Type-C charging.



Size: 1.50" x 1.50" x 1.50"/38 x 38 x 38 mm(excluding mount)
Weight: 1.57 oz/44.5 g (including battery)
Product ID: BC06R.11111

BC15R

Lightweight Cut-off Facula Line Bicycle Light

- Max 400 lumens output and 78 meters beam distance.
- USB Type-C charging.
- One switch control.
- Anti-glare cut-off facula line.
- Quick-release bike mount, easily operated.



Size: 4.02" x 1.24" x 1.22"/102 x 31.5 x 31 mm
Weight: 3.84 oz/109 g (including battery)
Product ID: BC15R.11111

BC45R

High-performance Mountain Bicycle Light



Utilizes one SFT-40 Gen2 and four SST-12 cold white LEDs.

Spotlight and floodlight for long-distance illumination and large-area lighting.

Three wireless control switches for precise operation.

Instant turbo.

OLED display shows battery percentage, brightness level, and other information.

USB Type-C charging port.

Size: 4.88" x 2.05" x 1.46"/124 x 52 x 37 mm
Weight: 11.57 oz/327.9 g (excluding batteries)
Product ID: BC45R.11111

BC22R

High-performance Road Bicycle Light

- Max 1400 lumens output and 156 meters beam distance.
- Supports both normal and inverse installations.
- Anti-glare cut-off facula line.
- Powered by a replaceable battery ; USB Type-C charging.
- Marine bionic design combined with aerodynamics.



Size: 4.53" x 1.34" x 1.14"/115 x 34 x 29 mm
Weight: 5.54 oz/157 g (including battery)
Product ID: BC22R.11111

BC25R

Lightweight Cut-off Facula Line Bicycle Light

- Max 600 lumens output.
- Anti-glare cut-off facula line.
- Micro USB rechargeable.
- One switch control.
- Quick-release bike mount, easily operated.



Size: 4.45" x 1.26" x 1.22" / 113 x 32 x 31 mm
Weight: 5.47 oz / 155 g (including mount and battery)
Product ID: BC25R.11111

Utility Model Patent: ZL 201720600803.X

BC26R

Ultra Bright Rechargeable Mountain Bicycle Light

- Max 1600 lumens output and 169 meters beam distance.
- USB Type-C charging.
- Quick-release design, two-step assembly and disassembly.
- Easy and fast operation with a single switch.
- Flash mode warns backside approaching drivers and passengers.
- Can be installed on the stopwatch holder with ALD-10.
- Can be used as a helmet light with the Fenix ALD-08 bicycle light helmet holder.



Size: 4.45" x 1.14" x 1.06" / 113 x 29 x 27 mm
Weight: 5.47 oz / 155 g (including battery)
Product ID: BC26R.11111

BC28R

Smart Control Front Light & Taillight Combo

- Max 2500 lumens output and 174 meters beam distance.
- Taillight can be controlled via front light for efficient and convenient operation.
- Taillight brightness level is displayed on the front light for intuitive adjustment.
- 92° wide-angle beam ensures clear view ahead.
- Can be used with the ALD-08 and the ALD-10.



Size:
Front light: 4.25" x 1.06" x 1.06" / 108 x 27 x 27 mm
Taillight: 1.18" x 1.18" / 30 x 30 mm
Weight: 8.46 oz/240 g (excluding batteries)
Product ID: BC28R.11111

BC30 V2.0

High-performance Smart Wireless Control Bicycle Light

- Max 2200 lumens output.
- Smart wireless control switch.
- All-metal housing.
- Quick-release bicycle mount, easy to assemble and disassemble.
- Dual Distance Beam System.
- Smart wireless control switch.



Size: 4.72" x 1.99" x 1.25" / 120 x 50.5 x 31.8 mm
Weight: 5.43 oz / 154 g (excluding battery)
Product ID: BC30.11112



CL SERIES



ENJOY CAMPING

Whether it is for hiking, camping or outdoor dining, **Fenix camping lanterns** will supply your bright light. Fenix lanterns are built to withstand the harsh conditions of outdoor use. Their versatile power sources, brilliant neutral white glow, and easy-to-use interface make them perfect for the most rugged campers on the planet. Fenix lanterns can last you longer due to their extreme durability.

NEW



CL20R V2.0

NEW



CL20R Pro

HOT



CL22R



CL26R Pro

HOT



CL27R

HOT



CL28R



CL30R

Camping Lanterns CL Series

CL22R

Compact Multifunctional Atmosphere Lantern



Size: 1.50" x 1.65" x 4.53" / 38 x 42 x 115 mm
Weight: 4.76 oz / 135 g (including battery)
Product ID: CL22R.20112
CL22R.11113, CL22R.14111



CL26R Pro

Multifunctional Portable Camping Lantern



Size: 2.60" x 2.34" x 4.49" / 66 x 59.5 x 114 mm
Weight: 7.02 oz / 199 g (excluding battery)
Product ID: CL26R.14112
CL26R.20112, CL26R.22112



CL27R

Spot-and-floodlight Multifunctional Outdoor Lantern

1600LM | 180M | 285H | IP66 | 1X5000mAh

- Spotlight and floodlight for long-range illumination and close-up lighting.
- Dual rotary switch allows free adjustment of the brightness and color temperature.
- 360° rotary handle and threaded tripod socket offer multiple mounting ways.
- White and red light sources.



Size: 4.32" x 1.56" x 3.61"/109.8 x 39.6 x 91.7 mm
Weight: 10.58 oz/300 g (including battery)
Product ID: CL27R.14111, CL27R.13112

Wild green

Glacier blue

CL28R

Multifunctional Outdoor Lantern

2000LM | 58M | 297H | IP66 | 2X5000mAh

- Dual rotary switches allow free adjustment of the brightness and color temperature.
- 360° rotary handle makes all-around lighting possible.
- USB Type-C charging port and USB-A discharging port.
- The lantern handle can be attached to magnetic metal surfaces.
- White and red light sources.

Design Patent: ZL 202130698237.2

Utility Model Patent: ZL 2021232781024



Size: 3.94" x 3.82" x 1.61"/100 x 97 x 41 mm
Weight: 13.26 oz/376 g (including batteries)
Product ID: CL28R.12111

CL30R

Charge And Discharge Camping Lantern

650LM | 35M | 300H | IPX-7 | 1~3X18650

- Max 650 lumens output, 35 meters beam diameter.
- Independent circuit design.
- Micro USB charging and discharging function.
- Built-in hanging loop and tripod socket interface.
- Can be floated on the water.



Size: 5.35" x 3.66" x 3.66" / 136 x 93 x 93 mm
Weight: 14.5 oz / 412 g (excluding battery)
Product ID: CL30R.11111

CL20R V2.0

CL20R Pro

Multicolor Ambient Camping Lantern

Black

Spring green

300LM	12M	320H	IP65	1900mAh
400LM	15M	320H	IP65	1900mAh



CL20R V2.0

Max 300 lumens output and 320 hours runtime.
Scene mode features multiple RGB lighting effects.
Corresponding outputs for the Switch light ring and the Scene mode are switchable.
Magnetic base and hanging loop for multiple mounting options.
Standard USB Type-C charging port.

Size: 3.15" x 1.89" x 2.13"/80 x 48 x 54 mm
Weight: 4.30 oz/122 g (including battery)
Product ID: CL20R.11111, CL20R.14111

CL20R Pro

Max 400 lumens output and 320 hours runtime.
Scene mode features multiple RGB lighting effects.
Corresponding outputs for the Switch light ring and the Scene mode are switchable.
Magnetic base and hanging loop for multiple mounting options.
Standard USB Type-C charging port.
Smart sensing function

Size: 3.15" x 1.89" x 2.13"/80 x 48 x 54 mm
Weight: 4.30 oz/122 g (including battery)
CL20R.11112, CL20R.14112

CP SERIES



CP50R

Multifunction Vehicle Camping Lantern

NEW




- Max 5500 lumens output, 450 meters beam distance.
- Spotlight and floodlight for both up-close and long-distance lighting.
- Standard USB-C charging port features battery level indication and low-voltage warning.
- USB-A and USB-C ports allow for convenient discharging.
- Dual rotary switch allows free adjustment of the brightness and color temperature.
- 360° rotary handle makes all-around lighting possible.
- Magnetic handle and threaded tripod socket for multiple mounting ways.

Size: 6.51" x 5.96" x 2.09"/165.3 x 151.5 x 53.2 mm
Weight: 26.77 oz/759 g (including batteries)
Product ID: CP50R.12111

ACCESSORIES

Fenix has been striving and succeeding in developing creative and practical accessories to enhance and dramatically improve the performance of our lighting products. Currently, Fenix offers users accessories including diffuser tips, filter adapters, traffic wands, remote switches, etc. to satisfy consumers' requirements.

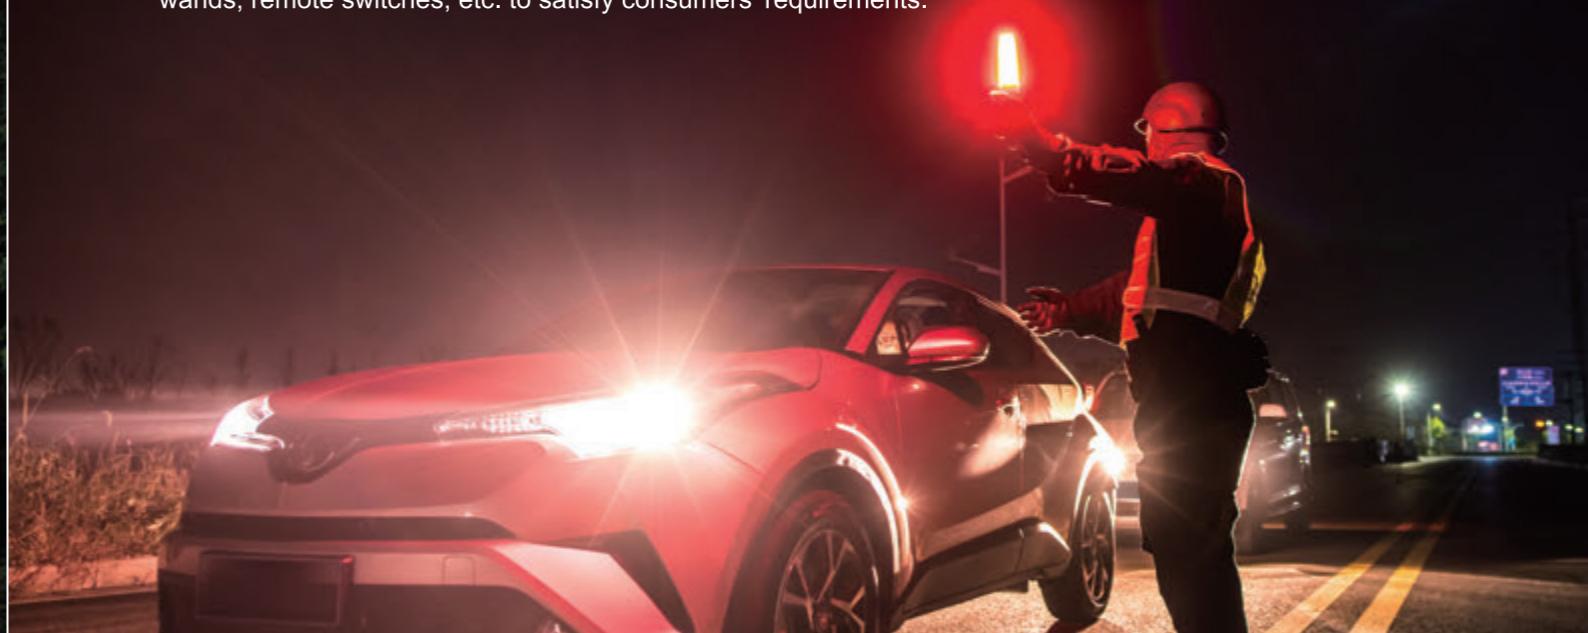

BATTERIES



Rechargeable Batteries

A protective circuit built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus eliminating the potential risk of short-circuiting caused by collision or impact.

- Triple overheat design, safe and reliable.
- Built-in overcharge and overdischarge protection circuit to ensure battery life.
- The circuit board is fully protected, with high reliability and impact resistance.

Model	Type	Capacity	Voltage	Model	Type	Capacity	Voltage
ARB-L16-1050UP	16340+Type-C	1050mAh	3.6V	ARB-L18-3400	18650	3400 mAh	3.6V
ARB-L14-1050	14500	1050 mAh	3.6V	ARB-L18-3400U	18650+Micro	3400 mAh	3.6V
ARB-L14-1650U	14500+Micro	1600 mAh	3.6V	ARB-L18-3400U V2.0	18650+Type-C	3400 mAh	3.6V
ARB-L14-2200U	14500+Type-C	2200 mAh	3.6V	ARB-L18-3400U V3.0	18650+Type-C	3400 mAh	3.6V
ARB-L16-1590P	16340	1150mAh	3.6V	ARB-L18-4000P	18650	4000 mAh	3.6V
ARB-L16-700UP	16340+Micro	700 mAh	3.6V	ARB-L18-4000U	18650+Type-C	4000 mAh	3.6V
ARB-L16-800P	16340	800 mAh	3.6V	ARB-L18-3500	18650	3500 mAh	3.6V
ARB-L16-800UP	16340+Type-C	800 mAh	3.6V	ARB-L18-3500U	18650+Micro	3500 mAh	3.6V
ARB-L18-1100	18350	1100 mAh	3.6V	ARB-L21-4000P	21700	4000 mAh	3.6V
ARB-L18-1100P	18350	1100 mAh	3.6V	ARB-L21-5000U	21700+Type-C	5000 mAh	3.6V
ARB-L18-2600	18650	2600 mAh	3.6V	ARB-L21-5000 V2.0	21700	5000 mAh	3.6V
ARB-L18-2600U	18650+Micro	2600 mAh	3.6V	ARB-L21-6000	21700	6000 mAh	3.6V
ARB-L18-3000P	18650	3000 mAh	3.6V	ARB-L21-6000B	21700+ Type-C	6000 mAh	3.6V



ALF-18 Battery Holder

The Fenix 18650 Li-ion battery can be used as a 21700 Li-ion battery when combined with this battery holder.

- PC + ABS materials - reliable and durable.
- Copper-plated positive contact - excellent performance in conductivity.
- Size: 2.41" x 0.85"/61.2 x 21.5 mm.
- Weight: 0.22 oz/6.1 g.

CHARGERS

ARE-A2 Dual Channel Charger



The Fenix ARE-A2 is a dual-channel charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries.
- AC and DC charging modes.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/Ni-Cd).
- Built-in short-circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



ARE-A4 Multifunctional Charger

The Fenix ARE-A4 is a four-channel smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries.
- AC and DC charging modes.
- Rated output power: 6W (Ni-MH/Ni-Cd), 16.8W (Li-ion).
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/Ni-Cd).
- Built-in short circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



ARE-D1 Single Channel Multifunctional Charger

The Fenix ARE-D1 is a single channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging, and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging, and discharging status.
- 0.5/1.0/2.0A - three charging current for option.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W(Li-ion).
- Short circuit protection, over-current protection, over-voltage protection, and reverse-polarity protection.



ARE-D2 Dual Channel Multifunctional Charger

The Fenix ARE-D2 is a dual channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging, and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging, and discharging status.
- 0.5/1.0/2.0A - three charging current for option.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection.



ARE-X1 V2.0 Single Channel Smart Charger

The Fenix ARE-X1 V2.0 is a single channel smart charger that features USB Type-C charging and USB discharging function, designed for 18650, 21700 and 26650 batteries, and provides charging, discharging, and battery power detection.

- Compatible with one 18650, one 21700 or one 26650 rechargeable Li-ion battery.
- Supports USB Type-C charging and USB discharging.
- LED charging/discharging indicator; LED battery power detection.
- Short circuit, over-current, over-voltage and reverse polarity protection.
- Microcomputer chip controlled, digitally regulated charging to extend battery life.

DIFFUSER TIP/FILTER ADAPTER/TRAFFIC WAND



AOD-S V2.0/AOD-M Diffuser Tip

Diffuser tips can soften the light and work as a camping light, signal light, reading light, tent light, etc.

- Imported novel optical material guarantees quality.
- Durable, impact-resistant, and fireproof to V2 Standard.
- Easy operation.



NEW AOD-04 Diffuser Tip

This AOD-04 diffuser tip can soften the light and work as a camping light and signal light,etc.

- Compatible Fenix light head: 40 mm.
- Soft silicone material, flexible, comfortable and easy to carry.
- Easy and firm assembly.
- Capable of tail standing.



AOF-S+V2.0/AOF-L Filter Adapter

This is a Fenix flashlight accessory with outstanding filtering ability to maintain strong red/blue/green light which can be used when signaling.

- Uses a toughened ultra-clear glass lens with an anti-reflective coating that provides heat resistance and maximum light penetrability.
- Germany's Bayer PC 2805 material, aging and impact resistant.
- Anti-roll design, easy to assemble and disassemble.



NEW AOF-18 Multi-color Filter set

- Easily attaches to belts.
- R/G/B/Y filters included.
- Made of high-density nylon.
- Applicable products: Fenix HT18/HT18R/HT18R V2.0.
- Filter size: 2.68"/68 mm (diameter).
- Filter weight: 0.49 oz/13.87 g.
- Pouch size: 7.09" x 4.33" /18 x 11 cm (folded); 11.02" x 7.09" /28 x 18 cm (unfolded)
- Pouch weight: 4.22 oz/119.7 g.



AOT-S+/AOT-M/AOT-01 Traffic Wand

Fenix traffic wand can convert your flashlight into a glowing red high-visibility wand. It's the best option for emergency situations and traffic control.

- German Bayer PC 2805 material.
- High compressive strength, impact resistance.
- High-temperature resistance and benign thermal stability.
- Easy to assemble and disassemble.



AOT-03/AOT-04 Traffic Wand

Fenix traffic wand can convert your flashlight into a glowing high-visibility wand. With red and white two color options, this traffic wand is an ideal option for flashlight lighting and traffic control.

- High-quality soft silicone material, reliable and flexible.
- Included lanyard hole for easy carry.
- Open bottom design for realizing flashlight illumination and traffic control.
- Compatible with a wide range of flashlight of various sizes.



ALG-00 Flashlight Ring

The Fenix ALG-00 features the quick detachable Picatinny rail design which suits tactical firearms with fish oil Picatinny rails. The compatible flashlight diameter ranges from 22.5 to 26 mm, and a wrench is needed when clipping flashlights. Full-metal housing made of durable aircraft-grade aluminum, and premium type III hard-anodized anti-abrasive finish in all-black treatment without light reflection.

TACTICAL ACCESSORIES

AER-02 V2.0 Remote Pressure Switch



The Fenix AER-02 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination (function may vary with flashlights).

- Tactical tail switch (round) for instant or constant activation.
- Noiseless (no click) pressure pad switch (30 mm long), which is more accurate in instant lighting, with a lifespan of 100,000 activations; capable of transmitting a current of 3A for a long period of time.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 25.4 mm Diameter x 31.5 mm Length.
- IP68-rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with a single tail switch.

AER-03 V2.0 Remote Pressure Switch



The Fenix AER-03 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination and output selection (function may vary with flashlights).

- Tactical tail switch (round) for instant or constant activation.
- Noiseless (no click) pressure pad switch (30 mm long), which is more accurate in instant lighting, with a lifespan of 100,000 activations; capable of transmitting a current of 3A for a long period of time.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 25.4 mm Diameter x 31.5 mm Length.
- IP68-rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with dual tail switch.

AER-04 Remote Pressure Switch



The new Fenix AER-04 remote pressure switch is specialized in tactical flashlights using 21700 battery. Its tail adapter is made of A6061-T6 aluminum with type III hard-anodized and anti-abrasive finish. The dual tail switch panel includes a full-silent forward switch and a tape switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1.14"/29 mm.
- Applicable thread: Tr25.5 x 0.06"/1.5 mm.
- Cable length: 9.06"/230 mm.
- Full length: 13.39"/340 mm.
- Weight: 1.48 oz/42 g.

AER-05 Remote Pressure Switch



The Fenix AER-05 remote pressure switch is specialized in tactical flashlights with APF circuits. The dual tail switch panel includes a silent pressure pad switch and a round tactical switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.

- Tail adapter diameter: 1.14"/29 mm.
- Applicable thread: Tr25.5 x 0.06"/1.5 mm.
- Cable length: 9.06"/230 mm.
- Full length: 13.39"/340 mm.
- Weight: 1.48 oz/42 g.

ALG-05 Remote Pressure Switch Mount



The Fenix ALG-05 remote pressure switch mount is specially designed for Fenix AER series tactical remote pressure switches. It perfectly fits the Picatinny rail by a simple push; featuring convenient assembly and disassembly, the mounting position can be flexibly adjusted. Designed specifically for tactical lighting, the remote pressure switch is within easy reach, so the flashlight can be momentarily switched on with a press of the button. The whole body of the mount is made of aluminum alloy with hard-anodized finish, and it is not reflective in matte black, which meets the needs of tactical concealment.



ALG-06 Remote Pressure Switch Mount

The Fenix ALG-06 tactical remote pressure switch mount can adapt the AER-02 V2.0/03 V2.0/04/05 remote pressure switch to the M-LOK rail, which is lightweight, and reliable.

- Lock fixation ensures no displacement.
- All-metal housing.
- Size: 2.72" x 0.93" x 0.40"/69 x 23.7 x 10.2 mm.
- Weight: 0.87 oz/24.7 g.



ALG-15 Flashlight Ring

The Fenix ALG-15 Flashlight Ring can fit a flashlight with a head diameter of less than 40 mm and a body diameter of 22.5 - 26 mm on the Picatinny rail (MIL-STD-1913), making quick disassembly and assembly possible by means of a screw nut.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight.
- Durable and wear-resistant material.
- Size: 2.95" x 1.22" x 1.18" / 75 x 31 x 30 mm.
- Weight: 1.36 oz / 38.6 g.



ALG-16 Flashlight Ring

The Fenix ALG-16 Flashlight Ring can fit the flashlight with a head diameter of less than 40 mm and a body diameter of 22.5 - 26 mm on the M-LOK rail, making quick disassembly and assembly possible by hand.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight.
- Durable and wear-resistant material.
- Size: 2.04" x 1.66" x 1.19"/51.7 x 42.1 x 30.1 mm.
- Weight: 1.88 oz/53.3 g.



ALG-18 Flashlight Ring

The Fenix ALG-18 Flashlight Ring is a functional accessory that helps to perform tactical/hunting applications; which suits weapon barrels ranging from 18 - 23 mm. The compatible flashlight body diameter ranges from 23.5 - 28 mm with a light head diameter of less than 70 mm. Made of durable and high-strength aluminum, the easy operation effectively assists in tactical/hunting scenarios.

- Allows for quick assembly and disassembly of the gun barrels.
- Tool-free assembly and disassembly.
- Fits a variety of barrel dimensions.
- Size: 2.99" x 1.81" x 1.37"/76 x 46 x 35 mm
- Weight: 3.10 oz/88 g



ALP-10S/10L Flashlight Holster

The Fenix ALP-10S/10L is a holster that is specifically designed for packing and protecting flashlights. The use of anti-tear nylon material features excellent abrasion resistance. Three layers of different materials are used, with one-time hot pressing, which is stylish and durable; the back webbing is designed with a combination of Velcro and nickel-plated metal button, ensuring strong stability and quick-release ability. The holster can be perfectly matched with the belt, backpack, and more. In this way, the flashlight is fully protected in a variety of scenarios such as law enforcement, outdoor lighting, searching and rescuing, etc.

- The use of anti-tear nylon material features excellent abrasion resistance.
- Strong stability and quick-release ability.
- Stylish and durable.



NEW

ALC-03 Quick-pull Strap-lock Holster

The ALC-03 quick-pull strap-lock holster is specifically designed for the dual light source of the TK25R, which includes both the main light and side lights. Made from nylon and fiberglass, this holster offers reliability and durability. Its metal clip lock ensures a secure attachment even during high-intensity movements.

- Positioning ring locks securely every 15°, offering precise positioning throughout its 360° rotation.
- 20mm wide-mouth clip for secure attachment to belts, backpacks, or other gear.
- Made from nylon and fiberglass, rugged and reliable.
- Applicable products: E28R V2.0, LD30, LD30R, LD35R, LD36R, PD36 TAC, PD36R Pro, PD36R V2.0, TK16 V2.0, TK17, TK20R V2.0, TK20R UE, TK21R, TK22 TAC, TK22R, TK25R, TK30R, HT30R, WF26R
- Size: 1.69" x 1.89" x 3.78"/43 x 48 x 96 mm. Weight: 3.25 oz/92 g.

HEADBAND/FANNY PACK/STORAGE BAG



AFB-10 Sports Fanny Pack

The Fenix AFB-10 is a waterproof sports fanny pack with a large storage capacity. It features an adjustable waist strap and cross-shaped headphone hole, making running more enjoyable. In addition, a reflective logo ensures safer night running.

- Folded and tensile design, the storage capacity of the pack can be extended.
- The inside is a TPU waterproof layer, plus a waterproof zipper, all of which makes the pack resistant to water and sweat.
- Hidden hole for headphone usage.
- High-elastic adjustable belt for a closed and personal fit.
- Reflective Fenix logo.
- 4 colors for options: black, gray, blue, orange.



T6 Automatic Retracting Tactical Pen

The Fenix T6 is a multifunctional self-defense tactical pen that is capable of illuminating, window-breaking and writing. Its maximum brightness reaches 80 lumens, and it supports Type-C charging. This tough pen features a zirconium bead that can break glass and assist in escape from danger. Inside every pen is an imported Schmidt pen cartridge for smooth, effortless writing. As you can expect, this rugged, high-performance writing tool is tough enough to provide you with a tactical advantage in emergency situations.

- Removable Schmidt 6.8CM metal pen refill for self-defense.
- Automatic retracting ink tip for smooth writing.
- Made of A6061-T6 aluminum.
- Premium type HAIII hard-anodized anti-abrasive finish.



AFH-02/AFH-03 Sports Headband

- Made of elastic and air-permeable nylon.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- Hollow design - breathable and comfortable.



ALR-01 Tactical Flashlight Ring

The Fenix ALR-01 tactical flashlight ring is designed for the multiple series of Fenix tactical flashlights that feature a body clip. The ring is easy to disassemble and assemble. It is made of high-strength nylon. The lightweight design and great portability provide users with a convenient and flexible flashlight operating experience to meet various holding needs.

Applicable products:

- TK series: TK16 V2.0/TK20R V2.0/TK20R UE/TK22 TAC/TK30
- PD series: PD36R PRO/PD36 TAC
- HT series: HT18/HT30R



AFH-05 Widened Perforated Quick-adjust Headband

- Made of elastic and durable nylon.
- Single-handed operation with the new two-way SPORT Headband Fit System.
- 36 mm widened design - stable and reliable.
- Safe reflective logo and lines.
- Applicable headlamps: HL16, HL18R-T, HL32R-T, HM65R-T V2.0



ALP-20 Open-top Leather Holster

The Fenix ALP-20 is a quick-pull leather case for duty flashlight. The whole is made of full-grain cowhide. The flashlight will not loosen after being inserted; it is a close-fitting concealed flashlight cover that is very suitable for casual clothes. Wear firmly, the flashlight will not shake even when running and under strenuous exercise. Body and thigh squeeze of the holster will not trigger the switch, and it is excellent to prevent accidental touch.

Applicable products:

- TK series: TK16 V2.0/TK20R V2.0/TK22R/TK30, etc.
- PD series: PD36R V2.0/PD40R V3.0, etc.



AFH-10 Sports Headband

The Fenix AFH-10 is a high-elastic quick-drying sports headband, made of air-permeable nylon fabric. The sweat-channeling silicone lines, reflective logo and lines make night activities safer.

- 70% nylon, 30% spandex - high-elastic and air-permeable.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- 4 colors for options: black, gray, blue, orange.

APB-20/APB-30 Headlamp Storage Bag



- Made of high-strength nylon cloth - lightweight and wear-resistant properties.
- Increased and large storage space, inner mesh cloth bag - enough for headlamp and battery storage.
- 50mm long lanyard.
- High-strength zipper.
- Applicable headlamps: HL10, HL12R, HL15, HL16, HL18R, HL23, HL26R, HM61R, HM65R, etc.
- 1000 times cycle use; 1-year free repair, lifetime limited warranty.

MOUNT/HOOK/LANYARD/EMERGENCY WHISTLE



ALB-10 Quick-release Bicycle Mount

Utilizing a unique split-type design for quick release of flashlights, the Fenix ALB-10 bicycle mount can effectively reduce the amount of steps and the time needed for mounting. Featuring Fenix's solidity and compatibility with a wide range of flashlights, this mount will ensure your safety during your night riding.

- Split-type design for quick release.
- Fits flashlights with a diameter of 18 mm - 26 mm.
- Rotating 30-degree design adjusts to any locking angle.
- A high-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar.
- Anti-aging, solid and able to withstand extended exposure to sunlight and rain.



ALB-20 Multipurpose Snap Hook

- Quick-release, stable wearing.
- Bottle opener.
- Straight screwdriver.
- Non-magnetizable.
- Size: 2.12" x 1.13" x 0.14"/53.8 x 28.6 x 3.5 mm.
- Weight: 0.32 oz/9 g.
- Material: Titanium alloy TC4.



ALD-02 Helmet Attachment Hook Set

- Made of environmentally friendly PC material.
- Keep the headband firm on the helmet.
- Suitable for helmets of thickness less than 6 mm.
- Not for fully protective outdoor sports headlamps and headlamps with foam lining.



ALD-05 Flashlight Helmet Holder

- Anti-static rubber fixing strap, compatible with all types of helmets.
- Adjustable clamping caliber - suitable for flashlights with an outer body diameter of 20 - 28 mm.
- 360° adjustable angle.



ALD-08 Bicycle Light Helmet Holder

Applicable to all Fenix BC series products excluding Fenix BC21R, BT30R, BTR20 and BT20.

- The fitted cable ties are applicable to a variety of bicycle helmets.
- Push and pull for one-second assembly and disassembly.
- Nylon and fiberglass - high toughness, strength and durability.
- Weight: 0.39 oz/11 g.
- Size: 2.87" x 2.20" x 0.55"/73 x 56 x 14 mm.



ALD-10 Bicycle Light Holder with GoPro Interface

The holder is lightweight, and the bicycle light can be easily fixed with a single push. It is applicable to all Fenix bicycle lights.

- International GoPro interface.
- Easy assembly.
- Compact and lightweight.



ALG-03 V2.0 Headlamp Attachment

ALG-03 V2.0 headlamp attachment is specifically designed for headlamp fixation to outdoor or industrial work helmets. It enables fast and convenient attachment and detachment of headlamps to and from the helmet and allows adjustment of the lighting angle of the headlamps.

- Made of quality nylon - durable and eco-friendly.
- Included TESA adhesive tapes.



ALG-04 V2.0 Headlamp Clip

The Fenix ALG-04 V2.0 helmet clip is specifically designed for headlamp fixation to professional helmets with shroud. It enables easy and convenient attachment and detachment of the headlamp to and from the helmet with the slots design.

- Applicable products: Fenix HM60R V2.0, HM61R V3.0, HM65R, HM65R-T V2.0, HM65R V2.0, HM70R, HM71R, HM75R, HM76R, HP35R(Regular version).
- Simple operation with the dual slide bar.



ALL-01 Soft Flashlight Lanyard

ALL-01 is a flashlight lanyard made of nylon and silicone sleeves. The length of the nylon cord and the silicone sleeves can be adjusted as needed. This flashlight lanyard is very comfortable to the hands and features non-slip as well.

- Applicable products: SD11, SD20, TK47UE, TK47, TK72R, TK75, RC40.
- Size: 0.35" Tube diameter x 9.25" Length (9 x 235 mm).
- Weight: 0.42 oz/12 g.



ALW-01 Wrist Flashlight Holder

The Fenix ALW-01 wrist flashlight holder is a wearable helper that is designed to hold a small flashlight with a body clip on your arm or your wrist. Constructed from durable PC material, the 360 ° adjustable flashlight holder is flexible for perfect hands-free illumination. The wrist strap is made of durable Nylon yarn, which is wear-resistant and comfortable to wear, and the adjustable range of the wrist strap is 140 - 200 mm. This wrist flashlight holder can be freely worn on the left or right hand.

- Body size: 2.09" x 1.77" x 0.83"/53 x 45 x 21.2 mm(Length x Width x Thickness).
- Wrist strap size: 9.06 x 1.57"/230 (±5) x 40 (±1) mm (Length x Width).
- Adjustable range of the wrist strap: 140 - 200 mm.
- Body weight: 0.56 oz/16 g, wrist weight: 0.32 oz/9 g; 0.88 oz/25 g in total.



NW20 Emergency Whistle

Fenix turns a world of emergency preparedness experience with reliable lighting products into these high-output whistles. Whether injury, disaster or personal threats are present, the easy-blowing design takes 30% less effort to reach up to 120 decibels peak out. Pealess construction from food-grade stainless steel provides decades of confidence even in harsh outdoor environments.

- Size: 1.77" x 0.61" x 0.31"/45 x 15.4 x 7.9 mm
- Weight: 0.71 oz/20 g
- Material: 304/304L stainless steel

FENIX ACCESSORIES COMPATIBILITY GUIDE

MODEL	Battery		Battery Holder	Diffuser Tip		Filter Adapter	Traffic Wand		Flashlight Ring		Remote Switch										
	ARB			AOD			AOT		ALG		AER										
	L16 (16340)	L18 (18650)	L21 (21700)	18	S V2.0	M	04	S+V2.0	L	S+	M	03	04	00	15	16	18	02 V2.0	03 V2.0	04	
Flashlight - E Series																					
E01 V2.0																					
E03R V2.0																					
E04R																					
E05R																					
E06R																					
E06R Pro																					
E09R																					
E12 V3.0																					
E18R V2.0																					
E20 V2.0																					
E28R V2.0																					
E35R																					
Flashlight - S Series																					
SW05R-RED																					
SW05R-UV																					
Flashlight - LD Series																					
LD12R																					
LD22 V2.0																					
LD30R																					
LD35R																					
LD36R																					
LD45R																					
Flashlight - PD Series																					
PD25R																					
PD26R ACE																					
PD32R																					
PD35 V3.0																					
PD35R																					
PD35R ACE																					
PD36R V2.0																					
PD36R Pro																					
PD36R ACE																					
PD36 TAC																					

Remote Switch	Flashlight Holster	Tactical Flashlight Ring	Quick-pull Strap-lock Holder	Headlamp Storage Bag	Headlamp Attachment	Headband	Bicycle Mount	Flashlight Helmet Holder	Bicycle Light Holder	Bicycle Lanyard	Wrist Flashlight Holder	Lanyard	MODEL
AER	ALP	ALR	ALC	APB	ALG	AFH	ALB	ALD	ALD	ALW	ALL		MODEL
05	06s	10S	10L	20	01	03	20	30	03 V2.0	04 V2.0	02	03	05
10	15	20	25	30	35	40	45	50	55	60	65	70	75
80	85	90	95	100	105	110	115	120	125	130	135	140	145
150	155	160	165	170	175	180	185	190	195	200	205	210	215
220	225	230	235	240	245	250	255	260	265	270	275	280	285
290	295	300	305	310	315	320	325	330	335	340	345	350	355
360	365	370	375	380	385	390	395	400	405	410	415	420	425
430	435	440	445	450	455	460	465	470	475	480	485	490	495
500	505	510	515	520	525	530	535	540	545	550	555	560	565
570	575	580	585	590	595	600	605	610	615	620	625	630	635
640	645	650	655	660	665	670	675	680	685	690	695	700	705
710	715	720	725	730	735	740	745	750	755	760	765	770	775
780	785	790	795	800	805	810	815	820	825	830	835	840	845
850													

FENIX ACCESSORIES COMPATIBILITY GUIDE

FENIX ACCESSORIES COMPATIBILITY GUIDE

FENIX PRODUCTS SPECIFICATION CHART

Model		Output	Runtime		Distance
E01 V2.0	High	100 lm	Alkaline Battery	Ni-MH Battery	35 m
	High	50 min	50 min		
	Med	25 lm	4 h 50 min	4 h 30 min	19 m
	Low	5 lm	25 h	23 h	9 m
E03R V2.0	High	500 lm	1 h 20 min		90 m
	Med	150 lm	2 h		50 m
	Low	30 lm	6 h 35 min		20 m
	Eco	5 lm	30 h		9 m
	Red	5 lm	/		/
	Red Flash	5 lm	/		/
	Breathing Light	1 lm	/		/
E05R	Instant Burst	400 lm	/		64 m
	High	150 lm	55 min		40 m
	Med	25 lm	5 h		17 m
	Low	3 lm	30 h		8 m
E06R	High	700 lm	1 h 20 min		110 m
	Med	150 lm	2 h 50 min		50 m
	Low	30 lm	12 h		23 m
	Eco	5 lm	60 h		9 m
	RGB	0.5 lm	/		/
	Red Flash	1 lm	/		/
	Blue Flash	1 lm	/		/
	Red & Blue Flash	1 lm	/		/
	UV Light	580mW 365nm	/		/
	Red Laser	≤0.39mW	/		/
E06R Pro	General Mode (Spotlight)	High	1000 lm	2 h 15 min	153 m
		Med	350 lm	2 h 30 min	90 m
		Low	150 lm	4 h 30 min	61 m
		Eco	30 lm	24 h	26 m
		Moonlight	5 lm	104 h	11 m
		High	750 lm	2 h 20 min	60 m
	General Mode (Floodlight)	Med	350 lm	3 h 12 min	40 m
		Low	150 lm	4 h 35 min	26 m
		Eco	30 lm	24 h 30 min	11 m
		Moonlight	5 lm	111 h	5 m
		Red flash	1 lm	/	/
		Blue flash	1 lm	/	/
	Scene Mode	Red & blue flash	1 lm	/	/
		RGB	0.5 lm	/	/
		Aurora	0.5 lm	/	/
		UV light	365nm	/	/
		Red laser	650nm	/	/
		Strobe	1600 lm	/	/
	Turbo	1600 lm	1 h 19 min		160 m

Model		Output	Runtime		Distance
E09R	Burst	600 lm	/		124 m
	High	300 lm	1.5 h		91 m
	Med	100 lm	4 h		56 m
	Low	25 lm	16 h		28 m
	Moonlight	3 lm	70 h		9 m
E12 V3.0	High	200 lm	1 h		78 m
	Med	30 lm	15 h		30 m
	Low	5 lm	100 h		12 m
	Turbo	1200 lm	1 h		146 m
	High	350 lm	2 h		81 m
E18R V2.0	Med	150 lm	3 h 20 min		53 m
	Low	30 lm	17 h		23 m
	Moonlight	1 lm	228 h		9 m
	Strobe	1200 lm	/		/
	E20 V2.0	Alkaline Battery		Ni-MH Battery	
	High	350 lm	3 h 45 min	1 h 30 min	126 m
	Med	150 lm	11 h 15 min	5 h 30 min	76 m
	Low	30 lm	93 h 35 min	34 h 30 min	35 m
	Eco	5 lm	200 h	140 h	15 m
E28R V2.0	Turbo	1700 lm	2 h 10 min		273 m
	High	600 lm	2 h 50 min		164 m
	Med	150 lm	17 h 15 min		80 m
	Low	50 lm	36 h 50 min		45 m
	Eco	5 lm	260 h		15 m
E35R	General Mode	Turbo	1700 lm	/	
		High	600 lm	/	
		Med	150 lm	/	
		Low	50 lm	/	
		Strobe	1700 lm	/	
LD12R	Main Light	Warning Light	1 lm	/	
		Turbo	3100 lm	2 h 30 min	
		High	1000 lm	3 h 40 min	
		Med	350 lm	9 h 20 min	
		Low	150 lm	21 h 20 min	
LD22 V2.0	General Mode	High	100 lm	1 h 20 min	
		Med	150 lm	3 h 20 min	
		Low	30 lm	16 h 20 min	
		Moonlight	1 lm	110 h	
		Side Light	High	4 h	
			Med	14 h 30 min	
			Low	5 lm	
			AA	ARB-L14-1600U2	
			Turbo	800 lm	1 h 20 min
LD30R	General Mode	Turbo	1700 lm	2 h 10 min	
		High	600 lm	2 h 50 min	
		Med	150 lm	14 h 40 min	
		Low	50 lm	37 h 25 min	
		Moonlight	1 lm	750 h	
		Strobe	1700 lm	/	
		SOS	50 lm	/	
		Turbo	1800 lm	2 h 19 min	
		High	800 lm	3 h	
		Med	350 lm	5 h 34 min	
LD35R	General Mode (Main Light)	Low	100 lm	22 h 39 min	
		Eco	20 lm	101 h 54 min	
		Strobe Mode	1800 lm	/	
		White Light	Dual-sided (High)	150 lm	6 h 2 min
		White Light	Dual-sided (Low)	80 lm	6 h 13 min
		White Light	Single-sided (High)	30 lm	15 h 44 min
		White Light	Single-sided (Low)	5 lm	86 h 35 min
		White Light	Red/Blue Flash	15 lm	51 h 7 min
		White Light	Red/Blue Flash	15 lm	31 h 28 min
		White Light	Blue Flash	15 lm	30 h 26 min
LD36R	General Mode	White Light	Red Flash	15 lm	55 h 13 min
		White Light	Red Constanton	5 lm	60 h 37 min
		White Light	Turbo	3600 lm	3 h 41 min
		White Light	High	1500 lm	3 h 55 min
		White Light	Med	350 lm	10 h 15 min
		White Light	Low	150 lm	28 h 58 min
		White Light	Eco	30 lm	65 h 18 min
		White Light	Strobe	3600 lm	/
		Colorful Light	Arctic green	330 lm	4 h 46 min
		Colorful Light	Neon purple	165 lm	4 h 5

FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME	DISTANCE
PD36R V2.0	Turbo	1700 lm	3 h 30 min	396 m
	High	800 lm	4 h 15 min	268 m
	Med	350 lm	7 h 45 min	177 m
	Low	50 lm	50 h	67 m
	Eco	5 lm	482 h	19 m
	Strobe	1700 lm	/	/
PD36R Pro	Turbo	2800 lm	3 h 30 min	380 m
	High	1000 lm	3 h 55 min	225 m
	Med	350 lm	8 h 15 min	130 m
	Low	150 lm	19 h	90 m
	Eco	30 lm	42 h	40 m
	Strobe	2500 lm	/	/
PD36R ACE	Turbo	3000 lm	3 h 2 min	415 m
	High	1000 lm	3 h 28 min	235 m
	Med	350 lm	8 h 49 min	137 m
	Low	150 lm	21 h 49 min	89 m
	Eco	30 lm	63 h 25 min	40 m
	Strobe	3000 lm	/	/
PD40R V3.0	SOS	150 lm	/	/
	Turbo	3000 lm	2 h 40 min	500 m
	High	1000 lm	3 h 10 min	300 m
	Med	350 lm	8 h 30 min	175 m
	Low	30 lm	89 h	50 m
	SOS	350 lm	/	/
PD45R ACE	Strobe	3000 lm	/	/
	Turbo	3200 lm	2 h 20 min	410 m
	Ultrahigh	1400 lm	3 h 20 min	252 m
	High	600 lm	5 h 30 min	165 m
	Med	300 lm	9 h 30 min	118 m
	Low	100 lm	30 h	66 m
TK05R	Eco	30 lm	57 h	36 m
	Strobe	3200 lm	/	/
	High	1000 lm	50 min	450 m
	Med	350 lm	1 h 45 min	260 m
	Low	30 lm	14 h 30 min	75 m
	Strobe	1000 lm	/	/
TK11R	High	1600 lm	1 h 50 min	420 m
	Med	350 lm	4 h 10 min	200 m
	Low	30 lm	25 h 30 min	60 m
	Strobe	1600 lm	/	/
TK16 V2.0	Turbo	3100 lm	2 h 40 min	380 m
	High	1000 lm	2 h 50 min	220 m
	Med	350 lm	8 h 20 min	125 m
	Low	150 lm	19 h 10 min	80 m
	Eco	30 lm	43 h 20 min	40 m
	Strobe	3100 lm	/	/

MODEL		OUTPUT	RUNTIME	DISTANCE
TK17	Burst	3600 lm	3 h 45 min	330 m
	High	1000 lm	3 h 50 min	170 m
	Med	350 lm	8 h	100 m
	Low	30 lm	60 h	30 m
	Strobe	3000 lm	/	/
	Turbo	3000 lm	2 h 50 min	475 m
TK20R V2.0	High	1000 lm	3 h 10 min	265 m
	Med	350 lm	7 h	150 m
	Low	150 lm	21 h 20 min	100 m
	Eco	30 lm	48 h	45 m
	Strobe	3000 lm	/	/
	Burst	3600 lm	2 h 30 min	480 m
TK21R	High	1000 lm	3 h 30 min	260 m
	Med	350 lm	7 h 30 min	150 m
	Low	30 lm	72 h 30 min	45 m
	Strobe	3000 lm	/	/
	Turbo	3200 lm	2 h 15 min	480 m
	Strobe	3200 lm	/	/
TK22R	Turbo	3200 lm	2 h 15 min	480 m
	High	1000 lm	2 h 35 min	265 m
	Med	350 lm	7 h 45 min	155 m
	Low	30 lm	50 h	45 m
	Lock/OFF Mode	/	/	/
	Turbo	3600 lm	2 h 20 min	350 m
TK25R	High	1000 lm	3 h	170 m
	Med	350 lm	7 h	100 m
	Low	30 lm	55 h	30 m
	Strobe	3600 lm	/	/
	White light (High)	150 lm	5 h	/
	White light (Low)	30 lm	30 h	/
TK30R	UV light	900mW	/	/
	Red light	15 lm	20 h	/
	Red flash	15 lm	/	/
	Red & blue flash	15 lm	/	/
	Turbo	1500 lm	1 h 15 min	350 m
	High	350 lm	4 h 27 min	170 m
TK26R	Med	150 lm	10 h 18 min	110 m
	Low	10 lm	100 h	30 m
	Strobe	1500 lm	/	/
	Red Light	150 lm	4 h 10 min	30 m
	Green Light	200 lm	5 h	40 m
	General Mode	High	500 lm	3 h 30 min
HT18R V2.0	Low	100 lm	8 h 50 min	600 m
	Strobe	2500 lm	/	/
	SOS	150 lm	/	/
	Beacon	3700 lm	/	/
	General Mode	Turbo	3700 lm	2 h
	Special Mode	High	1000 lm	3 h
HT32	Med	350 lm	6 h 50 min	330 m
	Low	30 lm	87 h	95 m
	Strobe	3000 lm	/	/
	SOS	150 lm	/	/
	White Light Mode	Turbo	2500 lm	1 h 50 min
	Red Light Mode	High	400 lm	3 h 15 min
TK30R	Med	350 lm	8 h	250 m
	Low	50 lm	29 h	100 m
	Strobe	2500 lm	/	/
	High	1400 lm	2 h 30 min	210 m
	Low	350 lm	6 h	100 m
	General Mode	High	500 lm	3 h 30 min
LR35R	Low	100 lm	8 h 20 min	270 m
	Strobe	10000 lm	/	/
	General Mode	High	5000 lm	2 h 43 min
	Low	2500 lm	3 h 10 min	350 m
	Strobe	8000 lm	135 h	40 m
	General Mode	High	8000 lm	2 h 40 min
LR35R Pro	Med	4000 lm	3 h	155 m
	Low	50 lm	103 h	15 m
	Strobe	10000 lm	2 h 38 min	445 m
	General Mode	High	5000 lm	3 h 13 min
	Low	80 lm	61 h	42 m
	Strobe	260 lm	6 h 49 min	68 m
LR36R	Med	130 lm	34 h	46 m
	Low	10 lm	\	10 m
	Strobe	260 lm	\	\
	General Mode	High	350 lm	20 h
	Laser Mode	Low	10 lm	\
	Strobe	10000 lm	\	\
LR50R	General Mode	High	10000 lm	270 h
	Functional Mode	Med	5000 lm	38 h
	General Mode	Low	50 lm	527 m
	Functional Mode	High	350 lm	15 h
	General Mode	Low	100 lm	514 m
	Functional Mode	Strobe	10000 lm	\
LR50R	General Mode	SOS	50 lm	38 h
	Functional Mode	Turbo	12000 lm	1 h 50 min
	General Mode	High II	6000 lm	2 h 20 min
	Functional Mode	High I	3000 lm	2 h 40 min
	General Mode	Med	1000 lm	7 h 40 min
	Functional Mode	Low	350 lm	24 h
LR50R	General Mode	Eco	50 lm	58 h
	Functional Mode	Turbo	12000 lm	950 m
	General Mode	Strobe	6000 lm	\
	Functional Mode	SOS	350 lm	\
	General Mode	General Mode	General Mode	General Mode
	Functional Mode	General Mode	General Mode	General Mode

MODEL		OUTPUT	RUNTIME	DISTANCE
TK28R	Turbo	6500 lm	3 h 20 min	400 m
	High	2000 lm	4 h	225 m
	Med	800 lm	4 h 40 min	140 m
	Low	150 lm	31 h 30 min	62 m
	Eco	30 lm	102 h	27 m
	Strobe	3000 lm	/	

FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME	DISTANCE	
LR40R V2.0	Spotlight Mode	High	3000 lm	3 h	886 m
		Med	1500 lm	3 h 40 min	650 m
		Low	500 lm	14 h 10 min	380 m
		Eco	10 lm	177 h	60 m
	Floodlight Mode	Turbo	12000 lm	2 h 30 min	340 m
		High	8000 lm	2 h 30 min	280 m
		Med	3000 lm	3 h	170 m
		Low	1000 lm	11 h	100 m
	Spot-and-floodlight Mode	Eco	100 lm	50 h	30 m
		Turbo	15000 lm	2 h 30 min	900 m
		High	10000 lm	2 h 30 min	780 m
		Med	5000 lm	2 h 40 min	591 m
	Flash Mode	Low	1500 lm	6 h	387 m
		Eco	300 lm	25 h	250 m
		Strobe	15000 lm	/	
		SOS	500 lm	/	
LR60R	Search Mode(Long Range Searching)	Turbo	21000 lm	1 h 50 min	1085 m
		High	3000 lm	3 h 45 min	1000 m
		Med	1000 lm	10 h 40 min	607 m
		Low	300 lm	24 h 20 min	330 m
		Eco	50 lm	113 h	132 m
	Camp Mode(Long Area Lighting)	Med	2000 lm	5 h 25 min	126 m
		High	6000 lm	3 h	218 m
		Turbo	15000 lm	2 h 10 min	352 m
		SOS	300 lm	/	/
		Strobe	9000 lm	/	/
LR80R	High-output Mode	Turbo	18000 lm	2 h	1130 m
		High	12000 lm	2 h 15 min	920 m
		Med	6000 lm	2 h 50 min	650 m
		Low	3000 lm	5 h 10 min	465 m
		High	1000 lm	15 h 40 min	265 m
		Med	450 lm	39 h	175 m
	Low-output Mode	Low	150 lm	92 h	105 m
		Eco	50 lm	300 h	50 m
		Strobe	6000 lm	/	/
		SOS	150 lm	/	/
		High	150 lm	2 h 32 min	39 m
		Med	30 lm	12 h 17 min	17 m
SW05R-RED	Low	Low	5 lm	49 h	7 m
		Red Constant-on	10 lm	10 h 2 min	5 m
		Red Flash	3 lm	61 h 51 min	/
	High	High	150 lm	2 h 32 min	39 m
		Med	30 lm	12 h 17 min	17 m
SW05R-UV	Low	Low	5 lm	49 h	7 m
		UV Light	1500 mW	3 h 14 min	/
		High	150 lm	2 h 32 min	39 m
	Med	Med	30 lm	12 h 17 min	17 m
		Low	5 lm	49 h	7 m

MODEL		OUTPUT	RUNTIME	DISTANCE
WF05E	White Light	High	85 lm	11.5 h
		Med	30 lm	35 h
		Low	10 lm	80 h
WF11E	White Light	High	200 lm	10 h
		Med	100 lm	29.5 h
		Low	30 lm	70 h
WF25RM	White Light	Burst	3000 lm	1 h 50 min
		High	1000 lm	3 h 10 min
		Med	400 lm	7 h 30 min
		Low	150 lm	22 h 20 min
		Eco	30 lm	77 h
		UV Light	500mW	/
WF26R	General Mode	Turbo	3000 lm	2 h 41 min
		High	1000 lm	2 h 47 min
		Med	350 lm	8 h 56 min
		Eco	30 lm	44 h 8 min
		Strobe	3000 lm	/
		SOS	100 lm	/
WF30RE	General Mode	High	300 lm	7 h 18 min
		Med	100 lm	22 h 53 min
		Low	30 lm	68 h
		Eco	5 lm	313 h 22 min
		SOS	30 lm	/
		High	300 lm	3 h 50 min
WT16R	Spotlight Mode	Med	100 lm	9 h 20 min
		Low	30 lm	30 h
		High	300 lm	3 h 50 min
		Low	100 lm	9 h 20 min
		Yellow Flash	10 lm	/
		High	300 lm	3 h 50 min
WT25R	General Mode	Turbo	1000 lm	3 h 40 min
		High	400 lm	4 h 50 min
		Med	150 lm	11 h
		Low	50 lm	29 h
		Strobe	1000 lm	/
		SOS	50 lm	/
HL12R V2.0	White Light	High	500 lm	2 h 23 min
		Med	150 lm	6 h 27 min
		Low	30 lm	25 h
		Eco	5 lm	112 h
		Constant-on	1 lm	40 h
		Flash	1 lm	80 h

MODEL		OUTPUT	RUNTIME	DISTANCE
HL16	White Light	Turbo	450 lm	3 h
		High	150 lm	8 h
		Med	50 lm	27 h
		Low	5 lm	100 h
		Red Light	5 lm	100 h
	General Mode	SOS	5 lm	200 h
		High	500 lm	2 h 50 min
		Med	150 lm	5 h 30 min
		Low	30 lm	23 h
		Red & Light	5 lm	/
HL17R	Scene Mode	High	500 lm	96 h 50 min
		Med	15 lm	8 h 55 min
		Low	3 lm	11 h 35 min
		Red & Blue Flash	3 lm	/
		RGB	2 lm	/
	General Mode	Aurora	2 lm	/
		Turbo	800 lm	3 h 20 min
		High	350 lm	6 h 30 min
		Med	130 lm	10 h
		Low	70 lm	20 h 40 min
HL18R-T V2.0	White Light	Turbo	500 lm	4 h 15 min
		High	130 lm	10 h
		Med	70 lm	20 h
		Low	5 lm	160 h
		Red Light	5 lm	100 h
	Scene Mode	Constant-on	5 lm	50 h
		High	800 lm	3 h
		Med	200 lm	8 h
		Low	70 lm	20 h
		Red Light	5 lm	/
HL32R-T	Floodlight Mode	High	200 lm	8 h
		Med	70 lm	20 h
		Low	5 lm	150 h
		SOS	5 lm	300 h
		High	800 lm	3 h
	General Mode	Med	200 lm	8 h
		Low	70 lm	20 h
		High	200 lm	8 h
		Med	70 lm	20 h
		Low	5 lm	300 h
HL40R	Functional Mode	High	300 lm	4.5 h
		Med	130 lm	11 h
		Low	70 lm	22 h
		Eco	30 lm	50 h

FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME	DISTANCE
HM62-T	White Light	Turbo	1200 lm	4 h
		High	400 lm	12 h
		Med	130 lm	23 h 40 min
	Red Light	Low	5 lm	280 h
		Constant-on	5 lm	60 h
		Flash	5 lm	120 h
		Turbo	1000 lm	4 h
HM65R	Spotlight Mode	High	400 lm	22 h
		Med	130 lm	42 h
		Low	50 lm	90 h
	Floodlight Mode	High	400 lm	20 h
		Med	130 lm	48 h
		Low	8 lm	280 h
		High	1600 lm	3 h
HM65R-T V2.0	White Light	Med	400 lm	12 h
		Low	130 lm	24 h
		High	800 lm	6 h
	Warm White Light	Med	400 lm	12 h
		Low	130 lm	24 h
		Eco	5 lm	300 h
		SOS	5 lm	600 h
HM70R	General Mode	Turbo	1600 lm	4 h
		High	500 lm	6 h
		Med	150 lm	30 h
	Functional Mode	Low	30 lm	100 h
		Red	5 lm	400 h
		Med	70 lm	48 h
		High	400 lm	8 h
HM75R	Spotlight Mode	SOS	5 lm	800 h
		ARBL18-3400	ARBL18-3400	ARBL18-3400
		ARBL18-3400	ARBL18-3400	ARBL18-3400
		ARBL18-3400	ARBL18-3400	ARBL18-3400
		ARBL18-3400	ARBL18-3400	ARBL18-3400
		Turbo	1600 lm	1200 lm
	Floodlight Mode	High	800 lm	3 h 30 min
		Med	350 lm	11 h
		Low	50 lm	50 h 50 min
		Turbo	1000 lm	700 lm
		High	400 lm	400 lm
		Med	150 lm	150 lm
HM77R	Red Light Mode	Low	5 lm	5 lm
		High	120 lm	120 lm
		Med	30 lm	32 h
	Strobe Mode	Low	5 lm	5 h 20 min
		High	120 lm	5 h 20 min
		Med	30 lm	32 h

MODEL		OUTPUT	RUNTIME	DISTANCE
HM71R	Spotlight Mode	Turbo	2700 lm	3 h
		High	800 lm	5 h
		Med	200 lm	16 h
	Floodlight Mode	Low	50 lm	48 h
		High	500 lm	8 h
		Med	200 lm	16 h
		Low	50 lm	48 h
HP12R-T	White Light	Turbo	1300 lm	4 h 40 min
		High	500 lm	18 h 20 min
		Med	70 lm	30 h
	Neutral White Light	Low	5 lm	310 h
		High	500 lm	6 h 10 min
		Med	200 lm	16 h
		Low	70 lm	24 h 30 min
HP25R V2.0	White Light	Turbo	1600 lm	2 h
		High	1000 lm	4 h
		Med	400 lm	8 h
	Neutral White Light	Low	150 lm	24 h
		High	400 lm	8 h
		Med	150 lm	24 h
		Eco	50 lm	56 h
HP30R V2.0	General Mode	Turbo	2000 lm	6 h
		High	800 lm	12 h
		Med	200 lm	34 h
	Floodlight Mode	Low	50 lm	120 h
		High	400 lm	12 h
		Med	150 lm	24 h
		Low	50 lm	120 h

MODEL		OUTPUT	RUNTIME	DISTANCE
HP16R	General Mode	Turbo	1250 lm	4 h
		High	400 lm	8 h
		Med	150 lm	12 h
	Functional Mode	Low	50 lm	36 h
		High	400 lm	8 h
		Med	150 lm	12 h
		Low	5 lm	300 h
HP35R	Spotlight Mode	Red	5 lm	300 h
		Flash	5 lm	600 h
		Turbo	3000 lm	5 h 43 min
	Floodlight Mode	High	800 lm	11 h 40 min
		Med	350 lm	28 h 24 min
		Low	50 lm	120 h
		Turbo	1200 lm	8 h
WH23R	Spotlight Mode	High	400 lm	30 h 48 min
		Med	50 lm	120 h
		Low	5 lm	500 h
	Floodlight Mode	Turbo	4000 lm	4 h 17 min
		High	1200 lm	8 h
		Med	400 lm	18 h
		Low	50 lm	120 h
WH35RE	General Mode	High	300 lm	6 h 19 min
		Med	120 lm	9 h 32 min
		Low	30 lm	35 h 57 min
	Floodlight Mode	High	300 lm	6 h 13 min
		Med	70 lm	15 h 36 min
		Low	5 lm	150 h
		Spotlight+ Floodlight	600 lm	3 h 49 min
GL06/ GL06-365	General Mode	High	280 lm	6 h
		Med	100 lm	14 h
		Low	30 lm	64 h
	Extreme Mode	Eco	5 lm	280 h
		SOS	30 lm	/
		Turbo	600 lm	140 m
		Med	200 lm	60 min
GL19R V2.0	White Light	High	280 lm	6 h
		Med	100 lm	14 h
		Low	30 lm	64 h
	Strobe	Eco	5 lm	280 h
		SOS	30 lm	/
		Turbo	600 lm	140 m
		Med	200 lm	60 min
GL07	White Light	High	1000 lm	10 h
		Med	200 lm	34 h
		Low	50 lm	120 h
	Strobe	High	1000 lm	10 h
		Med	200 lm	34 h
		Low	50 lm	120 h
		Turbo	3000 lm	5 h
GL22	White Light	High	1800 lm	6 h
		Med	400 lm	17 h
		Low	100 lm	60 h
	Red Laser	High	1800 lm	177 m
		Med	400 lm	85 m
		Low	100 lm	45 m
		Strobe	750 lm	500 lm

MODEL		OUTPUT	RUNTIME	DISTANCE
GL23R	White Light	1200 lm	1 h	240 m
	White Light + Green Laser	1200 lm + 520nm green laser≤5mW	1 h	240 m
	Green Laser	520nm green laser≤5mW	13 h	/
BC05R V2.0	High Flash(F			

FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT	RUNTIME	DISTANCE
CL20R V2.0	General Mode	High	300 lm	5 h 56 min
		Med	130 lm	15 h
		Low	30 lm	32 h
		Moonlight	1 lm	320 h
	Scene Mode	Red constant-on	1.5 lm	40 h
		Red flash	1.5 lm	80 h
		RGB chase	12 lm	10 h
		RGB flow	10 lm	10 h
	Switch Light Ring	Stepless RGB	25 lm	6 h 41 min
		Red constant-on	1 lm	/
		Red flash	1 lm	/
		RGB chase	1 lm	/
		RGB flow	1 lm	/
CL20R Pro	General Mode	High	400 lm	5 h 3 min
		Med	130 lm	15 h
		Low	30 lm	32 h
		Moonlight	1 lm	320 h
	Scene Mode	Red constant-on	1.5 lm	40 h
		Red flash	1.5 lm	80 h
		RGB chase	12 lm	10 h
		RGB flow	10 lm	10 h
	Switch Light Ring	Stepless RGB	25 lm	6 h 41 min
		Red constant-on	1 lm	/
		Red flash	1 lm	/
		RGB chase	1 lm	/
		RGB flow	1 lm	/
CL22R	General Mode	360°(High)	200 lm	10 h 12 min
		360°(Med)	100 lm	18 h
		360°(Low)	5 lm	160 h
		Down(High)	300 lm	7 h 15 min
		Down(Med)	150 lm	11 h 10 min
		Down(Low)	5 lm	200 h
		Combined (High)	500 lm	4 h
		Combined (Low)	10 lm	85 h
		Red Constant-on	10 lm	50 h
		Red Flashing	5 lm	100 h
	Scene Mode	Colors Jumping	17 lm	/
		Colors Morphing	17 lm	/
		Red Constant-on	9 lm	173 h
		Red Flash	9 lm	346 h
		White Light	High	2000 lm
CL28R	Red Light	Med	1000 lm	9 h
		Low	10 lm	42 m
		Red Constant-on	9 lm	4 m
		Red Flash	9 lm	4.5 m

MODEL		OUTPUT	RUNTIME	DISTANCE
CL26R Pro	CL26R Pro	High	500 lm	10 h
		Med	200 lm	13 h
		Low	50 lm	40 h
		Front	25 lm	67 h
		Down 1	5 lm	408 h
		Down 2	50 lm	58 h
		Down 3	150 lm	15 h
		Red Light	3 lm	125 h
CL27R	CL27R	Red Flash	3 lm	240 h
		Floodlight Mode	High	1200 lm
			Med	600 lm
			Low	10 lm
		Spotlight Mode	High	800 lm
			Med	400 lm
			Low	5 lm
			High	1600 lm
		Flashlight Mode	Low	15 lm
			Constant-on	10 lm
CL30R	CL30R	Red Light Mode	Flashing	72 h
			Turbo	144 h
		2600mAh	2600mAh	4.5 m
			3500mAh	4.5 m
			High	650 lm
			Med	350 lm
			Low	100 lm
			Eco	300 lm
CP50R	CP50R	Floodlight	High	3000 lm
			Med	1500 lm
			Low	10 lm
		Spotlight	High	3000 lm
			Med	1500 lm
			Low	7 lm
			High	5500 lm
		Warning	Med	12 h
			Low	20 lm
			Red constant-on	25 lm
			Red flash	25 lm
		Warning	Red chase	25 lm
			Yellow flash	10 lm
			Green constant-on	10 lm



Brand Honor



LIGHTING FOR EXTREMES

Upholding the spirit of challenging limits and striving for excellence, **Fenix** offers reliable, professional, and innovative products and services to support users to accomplish their dreams in extreme environments.



CUSTOMER SERVICE

Fenix Product Warranty Terms

15 Days Free Replacement

15 days free replacement: Fenix will replace a new product within 15 days of purchase for any manufacturing defects if problems come into being in normal use; We will replace it with the same model. If the model has been discontinued, customers will receive a product with a similar or improved model.

5 Years Free Repair

5 years free repair: Fenix will offer free repair within 5 years for lights from the date of purchase if a problem develops with normal use. Different warranty periods for different products:

Product Type	Warranty
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (included rechargeable lights but not built-in battery)	5 years battery for 1 year
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (with built-in battery)	2 years (battery included)
Rechargeable batteries, chargers, bike mount, and remote pressure switch	1 year

Limited Lifetime Warranty

Limited lifetime warranty: For lights past the free repair warranty period, we provide lifetime repairs but will charge for parts. The distributor will notify the customer of the cost of the part before repair.

Extended Warranty Service

An extra 6-month warranty period is obtained once you have successfully registered on the official website for Fenixlight Limited (www.fenixlight.com), which only applies to flashlights, tactical lights, headlamps, bike lights and camping lanterns.

Warranty Certificate

Customers requesting after-sales service from Fenix distributors or dealers, should present their completed Fenix Warranty Card, purchase invoice or receipt. The distributor should then provide service to the customer/s, and Fenix will support backup for this service.

The free warranty does not cover any damages or failure caused by:

- (1) Normal wear
- (2) Rough operation
- (3) Battery leakage
- (4) Any defects or damages caused by the improper operations include but not limited to the operation which doesn't comply with the warranty or notes shown in the product specification. For example, the product specification will describe that please don't disassemble the sealed head, as doing so can damage the flashlight and will void the warranty.
- (5) Any defects or damage led by other behaviors which can not be controlled by Fenix reasonably.

For any problems/suggestions, please email our Customer Service Department:

service@fenixlight.com (Europe/America regions)
service_1@fenixlight.com (Asia/Oceania/Africa regions)
Tel: +86 400 8866 093 /+86 755 2963 1193



CONTACT US



Facebook



Instagram



YouTube